
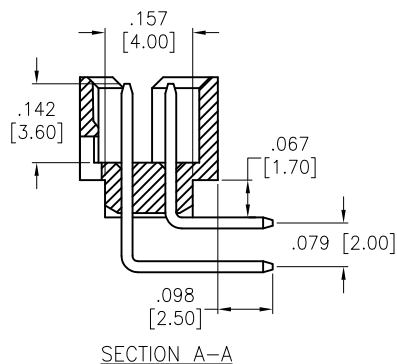
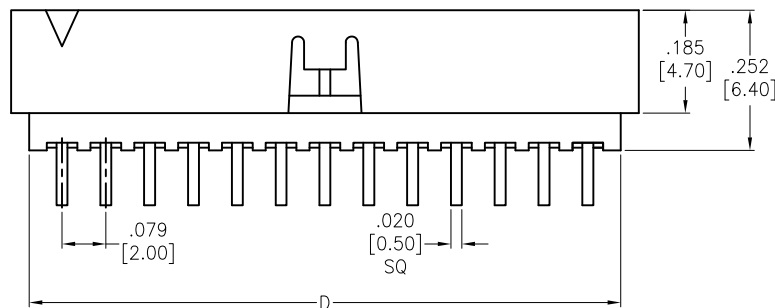
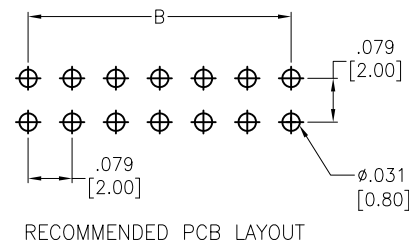


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/25/16	

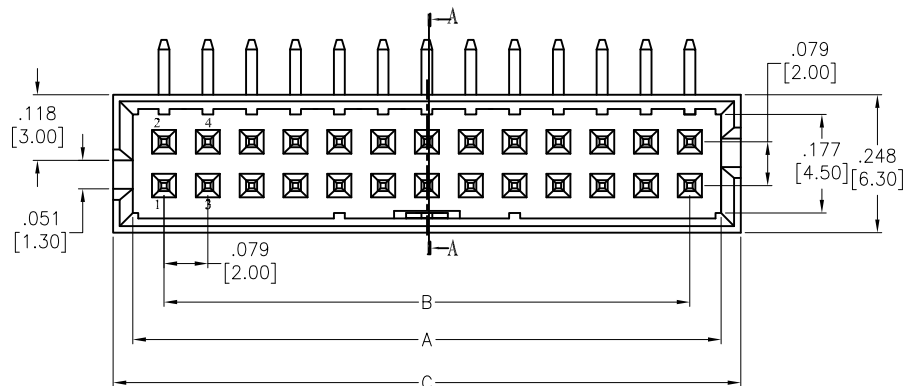

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass

Plating:
 15u" Gold over Nickel underplate on contact area,
 Tin over Nickel underplate on tails.

Electrical:
 Current rating: 2.0 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC/DC for 1 minute

Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 8, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50
 A = .079 [2.00] X No. of Positions per row+ .033 [0.85]
 B = .079 [2.00] X No. of Spaces per row
 C = .079 [2.00] X No. of Positions per row+ .104 [2.65]
 D = .079 [2.00] X No. of Positions per row+ .039 [1.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS		DATE	TITLE		
DRAWN	AY	3/25/16	.079 [2.00] BOX HEADER, DUAL ROW, RIGHT ANGLE, 15u" SEL GOLD PLATED		
CHECKED	MY	3/25/16	SIZE	PART NO.	REV.
APPROVED			X	2BHR-A2-XX-HSGA-SS-15	-
REF: S00019C			SCALE: NTS		SHEET 1 OF 1