
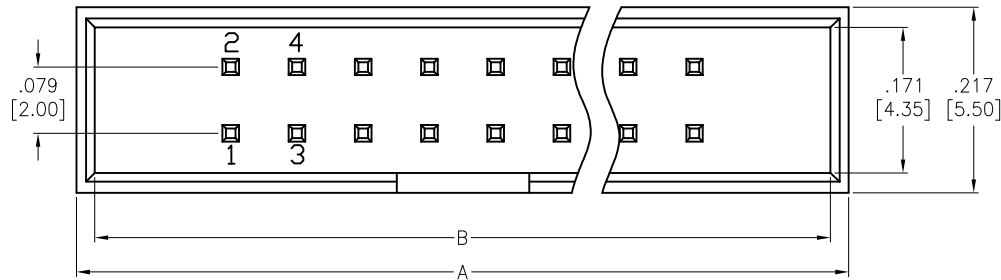




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/15/17	
A		UPDATE DRAWING	6/25/19	OW/IW
B		UPDATE DIM.	9/10/20	AY/CC
C		UPDATE DRAWING	5/30/24	JJ/TY

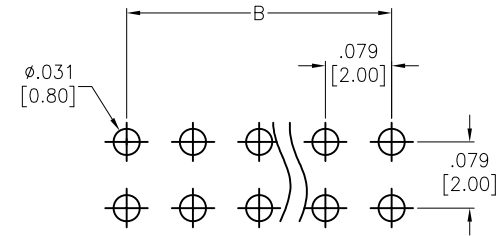

RECOMMENDED PCB LAYOUT

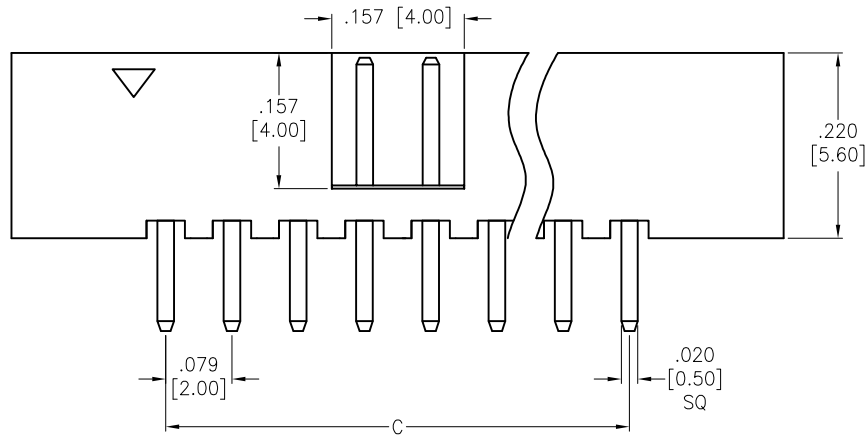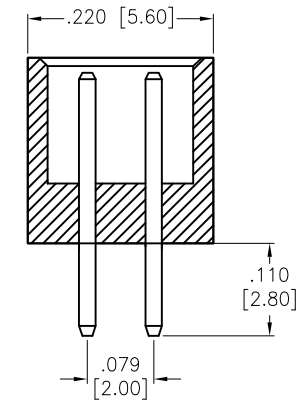

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms Max

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 100

A = .079 [2.00] x No. of Positions per Row + .287 [7.30]

B = .079 [2.00] x No. of Positions per Row + .244 [6.20]

C = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	AY	6/15/17
CHECKED	OC	6/15/17
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
.079 [2.00] BOX HEADER, STRAIGHT, GOLD PLATED, DIP TYPE, HI-TEMP			
SIZE	PART NO.		REV.
X	2BHR-A4-XX-VUA-HT		C
REF:	S00111C	SCALE: NTS	SHEET 1 OF 1