





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/9/17	
A		UPDATE CAP	2/18/19	AY/LW

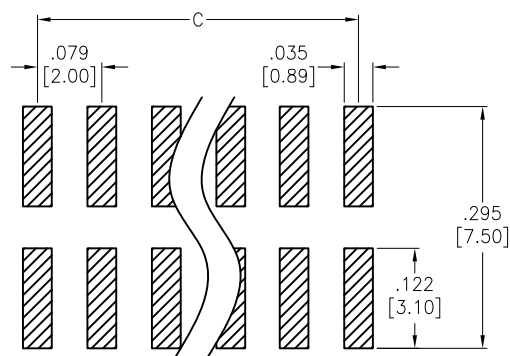

RECOMMENDED PCB LAYOUT

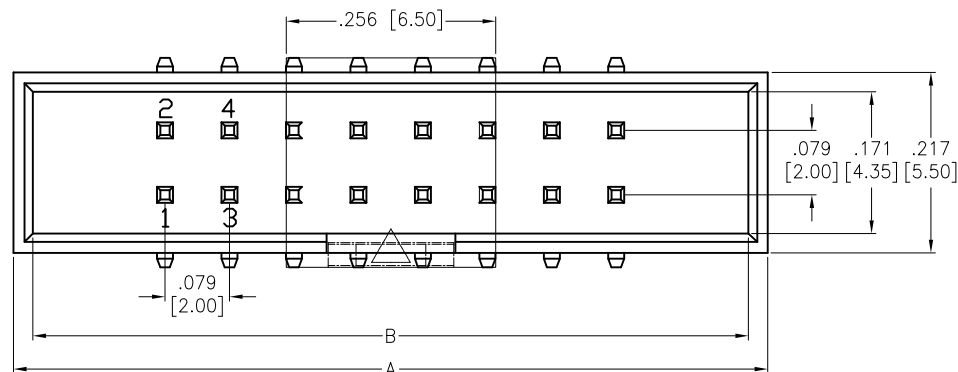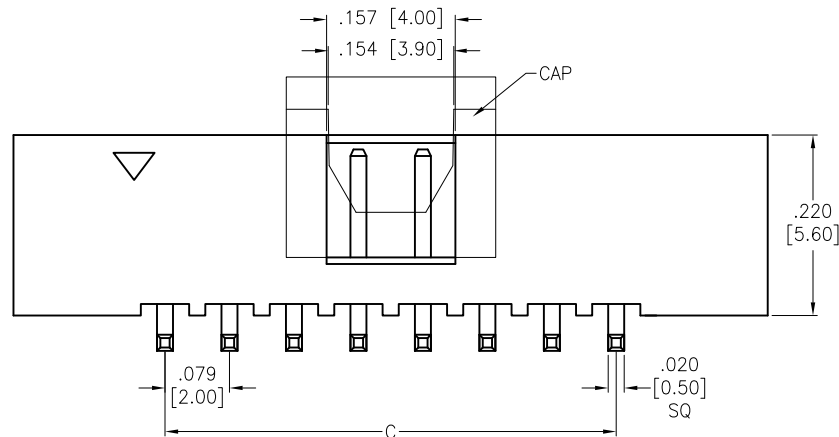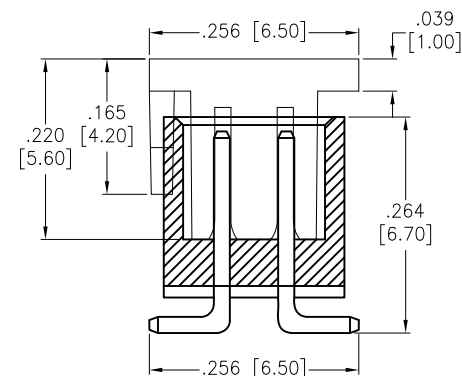

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms Max

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 100

A = .079 [2.00] x No. of Positions per Row + .287 [7.30]

B = .079 [2.00] x No. of Positions per Row + .244 [6.20]

C = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS DATE

DRAWN AY 3/9/17

CHECKED CT 3/9/17

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] BOX HEADER, STRAIGHT,
GOLD PLATED, SURFACE MOUNT

SIZE X PART NO. 2BHR-A4-XX-VUA-SMT-PP REV. A

REF: S00111C SCALE: NTS SHEET 1 OF 1