





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/15/17	
A		UPDATE CAP	2/18/19	AY/LW

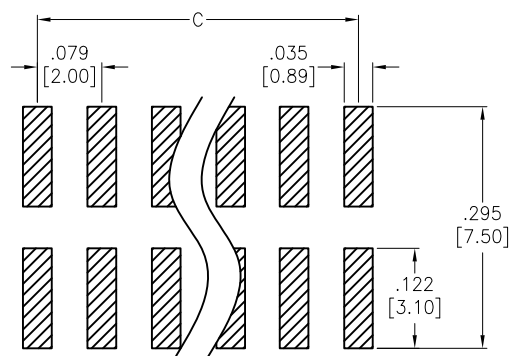

RECOMMENDED PCB LAYOUT

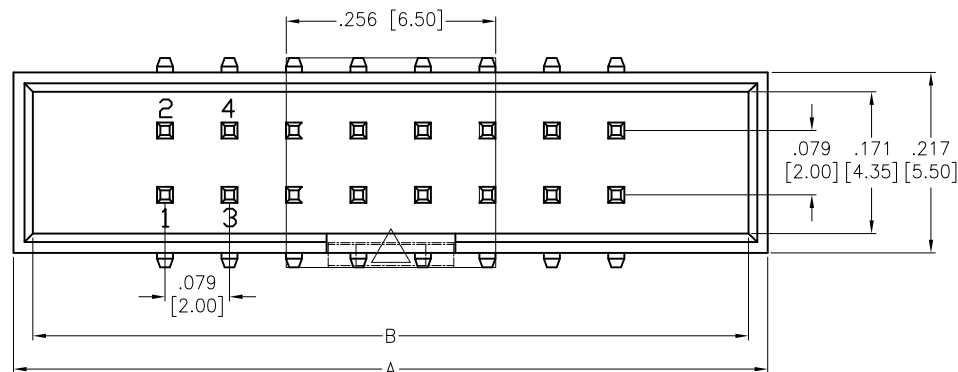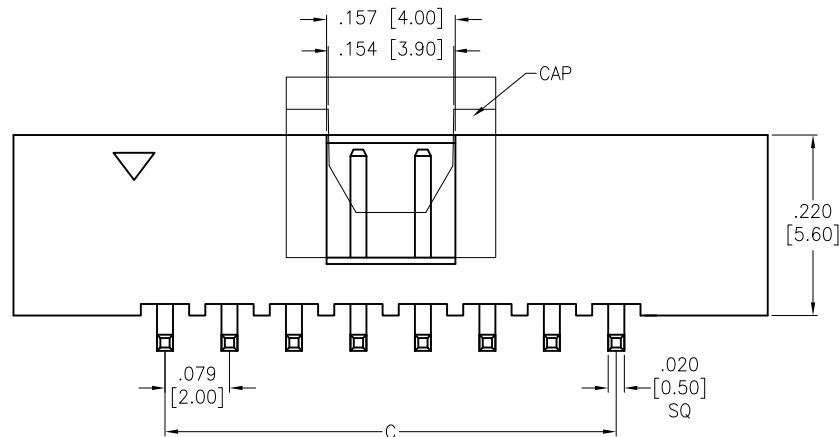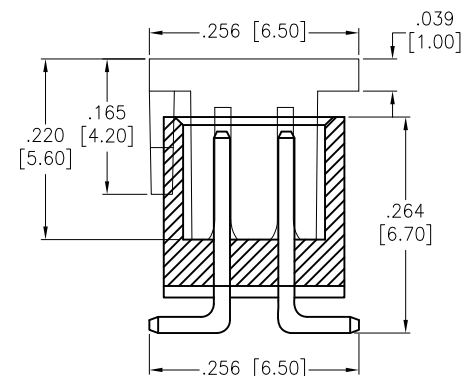

PACKAGED ON TAPE & REEL

Positions: 04 thru 100

A = .079 [2.00] x No. of Positions per Row + .287 [7.30]

B = .079 [2.00] x No. of Positions per Row + .244 [6.20]

C = .079 [2.00] x No. of Spaces

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms Max

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<div>ADAM TECH</div> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES			
.X ± .10 ØX ± .10 .XX ± .020 ØXX ± .015 .XXX ± .015 ØXXX ± .010			
APPROVALS		TITLE	
DRAWN AY 6/15/17		.079 [2.00] BOX HEADER, STRAIGHT, GOLD PLATED, SURFACE MOUNT	
CHECKED OC 6/15/17		SIZE PART NO. REV.	
APPROVED		X 2BHR-A4-XX-VUA-SMT-PP-T/R A	
		REF: S00111C SCALE: NTS SHEET 1 OF 1	