
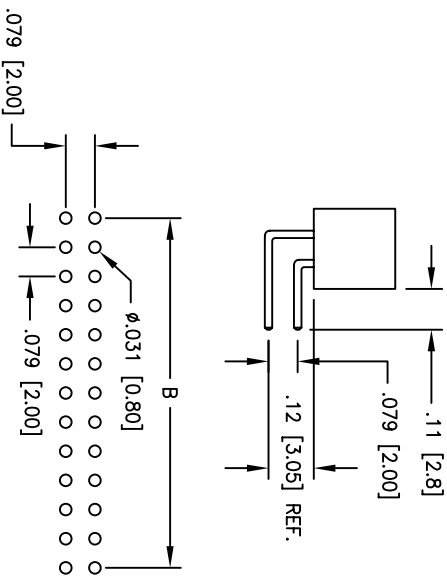
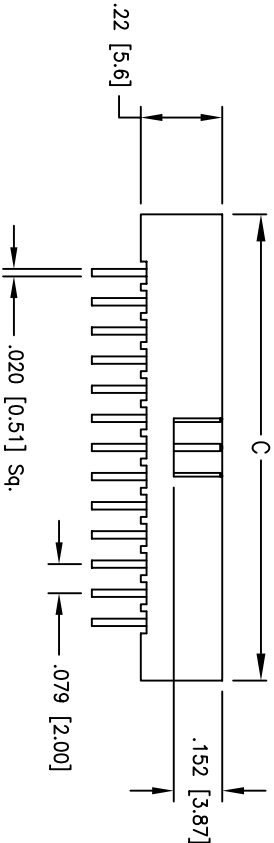


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/25/08	

APPROVED: _____
DATE: _____ TITLE: _____

POSITION	A	B	C
10	.315 [8.00]	.633 [16.08]	.673 [17.10]
12	.394 [10.00]	.712 [18.08]	.752 [19.10]
14	.472 [12.00]	.791 [20.08]	.831 [21.10]
16	.551 [14.00]	.869 [22.08]	.909 [23.10]
20	.709 [18.00]	1.027 [26.08]	1.067 [27.10]
26	.945 [24.00]	1.263 [32.08]	1.303 [33.10]
34	1.260 [32.00]	1.578 [40.08]	1.618 [41.10]
40	1.496 [38.00]	1.814 [46.08]	1.854 [47.10]
44	1.654 [42.00]	1.972 [50.08]	2.012 [51.10]
50	1.890 [48.00]	2.208 [56.08]	2.248 [57.10]
68	2.598 [66.00]	2.917 [74.08]	2.957 [75.10]

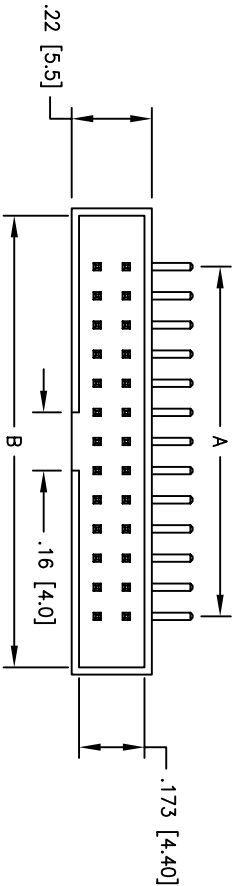

RECOMMENDED PCB LAYOUT

Tolerances: ±.004 [±.10]

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over nickel underplate on contact area, Tin over copper underplate on tails.

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE 2.0mm DUAL ROW, HORIZONTAL

MOUNT BOX HEADER, SELECTIVE GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES. [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH			
INCHES				909 Rahway Avenue, Union, NJ 07083			
HOLES				Phone: 908-687-5000 Fax: 908-687-5710			
X	±.10	ØX	±.10	TITLE 2.0mm DUAL ROW, HORIZONTAL			
.XX	±.020	ØXX	±.015				
XXX	±.015	ØXXX	±.010				
APPROVALS				MOUNT BOX HEADER, SELECTIVE GOLD PLATED			
DRAWN	DY	9/25/08		SIZE PART NO.			
CHECKED							
APPROVED							
				2BHR-XX-HSGA-HT			
				SCALE: NTS			
				SHEET 1 OF 1			