
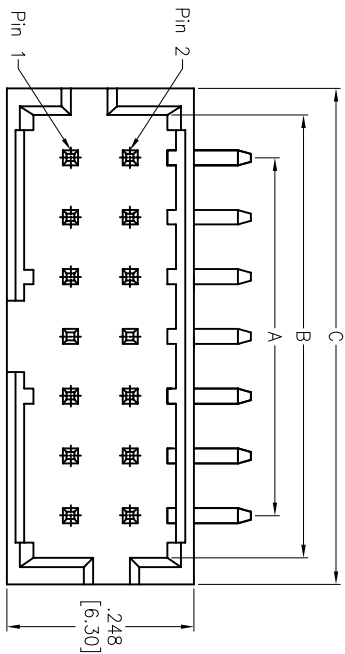


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/24/13	




APPROVED: _____

DATE: _____ TITLE: _____

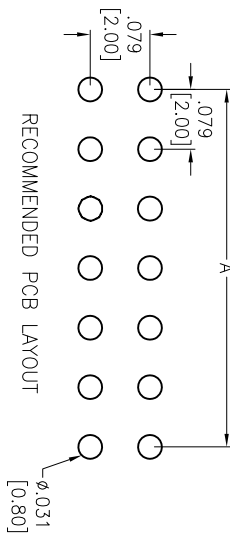

RECOMMENDED PCB LAYOUT

Below 14 pin product is without any "window."

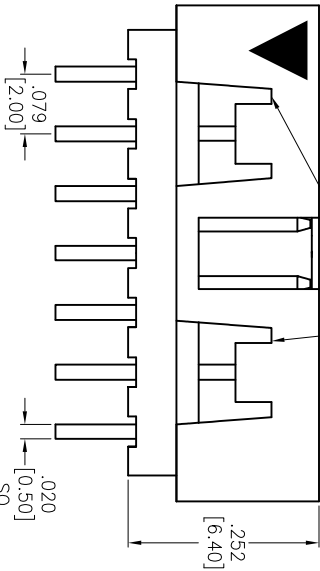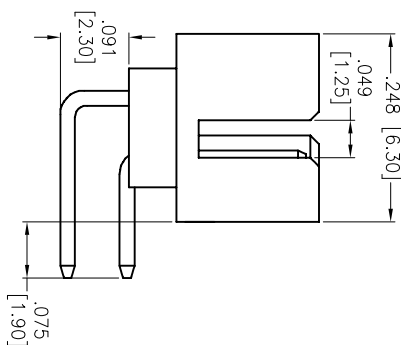

Positions: 8, 10, 12, 14, 16, 18, 20, 24, 26, 28, 34, 40 & 44

A = .079 [2.00] x No. of Spoces

B = .079 [2.00] x No. of Spoces + .112 [2.85]

C = .079 [2.00] x No. of Spoces + .183 [4.65]

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

15u" Gold over Nickel underplate on contact area,

Tin over Copper underplate on tails

Electical:

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Ratway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079" [2.00MM] DUAL ROW, HORIZONTAL

MOUNT BOX HEADER, SEL-GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				HOLES			
APPROVALS				DATE				DATE			
DRAWN	AY			1/24/13							
CHECKED	AH			1/24/13							
APPROVED											

SIZE	PART NO.	REV.
X	2BHR-XX-HSGA-SS-15	-

REF:	S00039T	SCALE:	NTS	SHEET	1 OF 1
------	---------	--------	-----	-------	--------