

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/15/13	


APPROVED: _____


DATE: _____ TITLE: _____

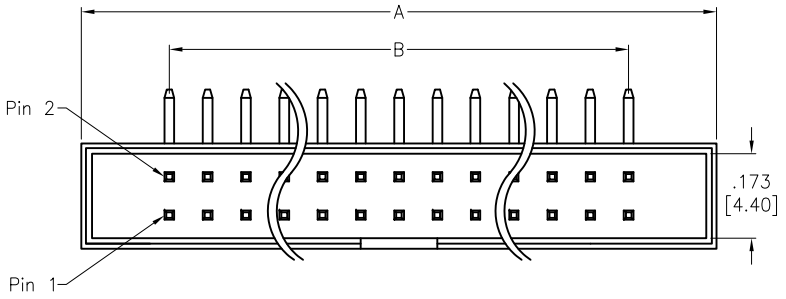

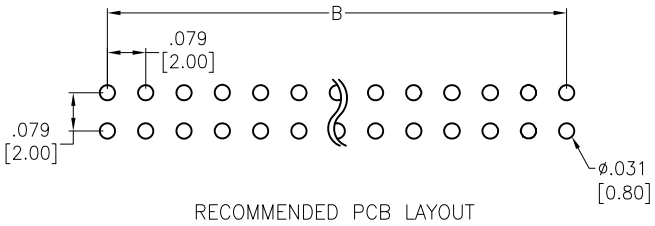

RECOMMENDED PCB LAYOUT

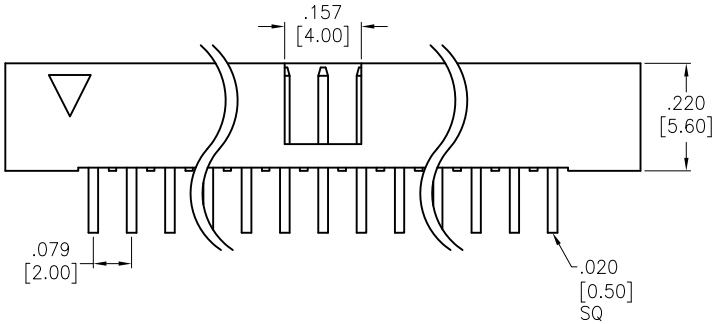



SPECIFICATIONS:

Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass

Plating:
15u" Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails

Electrical:
Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
Operating temperature: -40°C to +105°C

Environmental:
Lead free, RoHS compliant.

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36
40, 44, 50, 60, 64 & 68
A= .079 [2.00] x No. of Spaces + .362 [9.20]
B= .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/15/13
CHECKED	EH	7/15/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2.0mm DUAL ROW, HORIZONTAL MOUNT BOX HEADER, 15u" SEL-GOLD

SIZE	PART NO.	REV.
X	2BHR-XX-HSGB-.094-HT-15	-

REF: S00059T | SCALE: NTS | SHEET 1 OF 1