

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/14/22	
A		UPDATE SPEC.	10/31/22	WX/KL

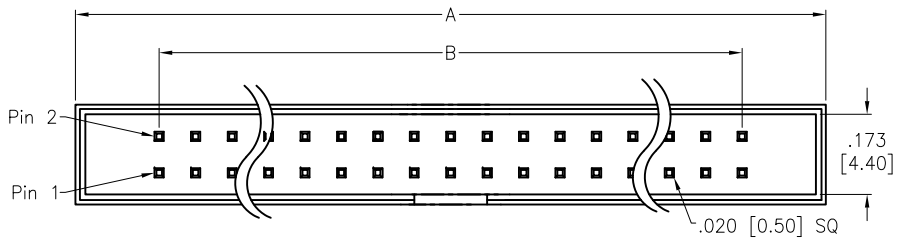

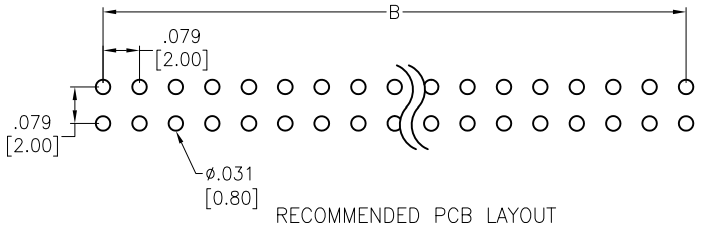

RECOMMENDED PCB LAYOUT

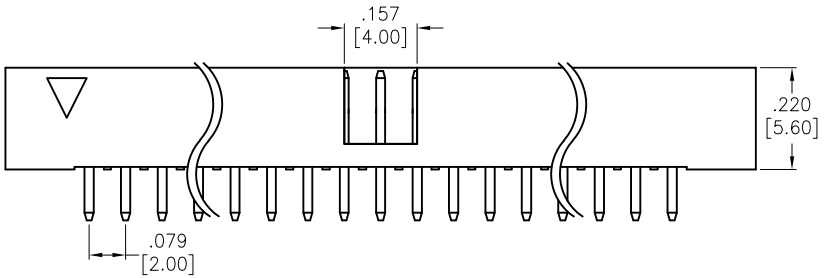



SPECIFICATIONS:

Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass

Plating:
15u" Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails

Electrical:
Current rating: 1 Amp
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min @DC 500V
Dielectric withstanding voltage: 500 VAC for 1 minute (A)

Temperature Rating:
Operating temperature: –40°C to +105°C

Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

Positions: 6, 8, 10, 12, 14, 16, 32, 34, 36, 40, 44, 50, 60, 64 & 64
A= .079 [2.00] x No. of Spaces + .362 [9.20]
B= .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	10/14/22
CHECKED	KL	10/14/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: 2.00MM BOX HEADER, VERTICAL
PCB, 15u" SEL-GOLD PLATED, HI-TEMP

SIZE	PART NO.	REV.
X	2BHR-XX-VSGA-HT-15	A

REF: S00059T | SCALE: NTS | SHEET 1 OF 1