

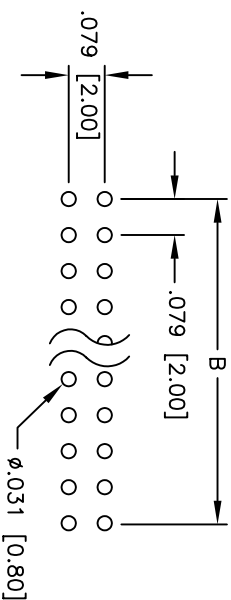
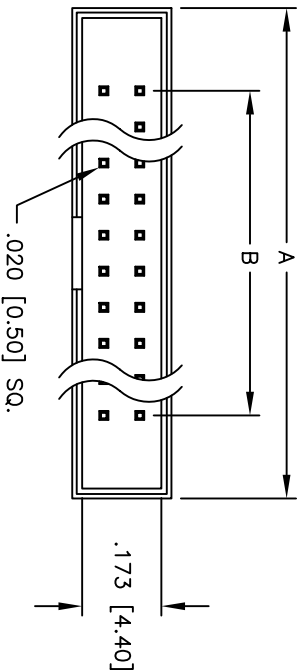


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/05	

APPROVED: _____
DATE: _____ TITLE: _____

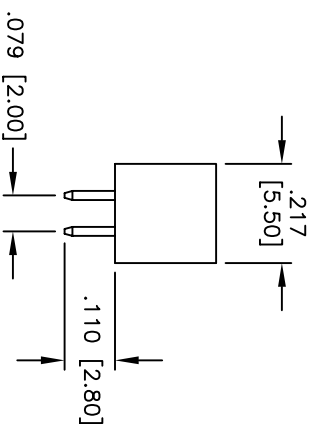

PCB LAYOUT

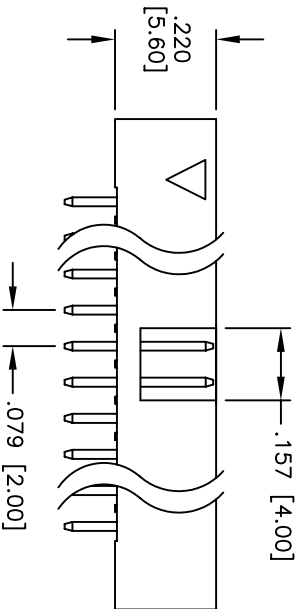

SPECIFICATIONS:

Material: Insulator: PBT, Glass filled, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical: Operating voltage: 250 VAC max.
Current rating: 1 Amp max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating: Operating temperature: -55°C to +105°C
Environmental: Lead free, RoHS compliant
Recommended soldering temp: 230°C for 5 seconds

Positions: 8, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 64
A = .079 [2.00] x No. of Spaces + .362 [9.20]
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES .X ± .10 .XX ± .020 .XXX ± .015			Holes ØX ± .10 ØXX ± .015 ØXXX ± .010			TITLE .079 [2.00] BOX HEADER, STRAIGHT, TIN PLATED, STANDARD SOLDER TAIL		
APPROVALS			DATE					
DRAWN	SS	3/24/05						
CHECKED								
APPROVED								
SIZE			PART NO.			REV.		
X			2BHR-XX-VTA			-		
REF:			SCALE: NTS			SHEET 1 OF 1		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710