

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/21/21	
A		UPDATE DRAWING	10/14/22	LH/KL

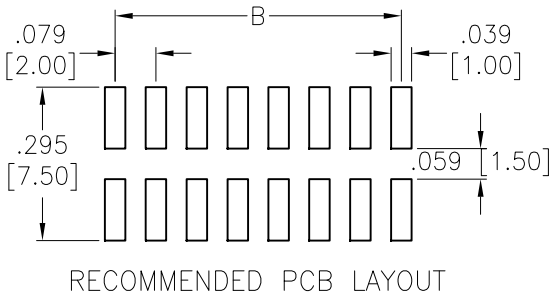

RECOMMENDED PCB LAYOUT

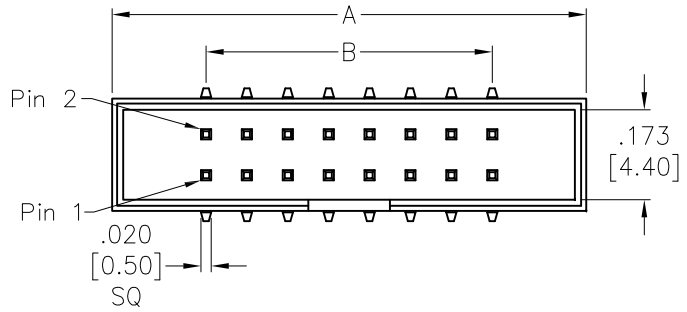

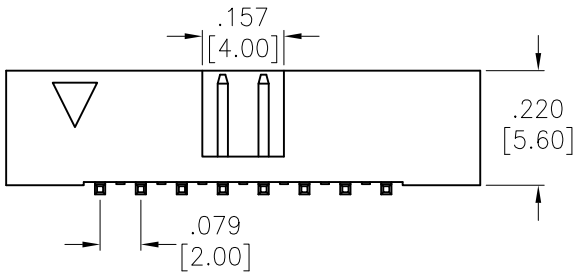



SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
15u"Gold over Nickel underplate overall
Electrical:
Current rating: 1 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 5,000 Mohms min @ 500V DC.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

A = .079 [2.00] X No. of Spaces + .362 [9.20]
B = .079 [2.00] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	1/21/21
CHECKED	SS	1/21/21
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
2.00 MM BOX HEADER, VERTICAL, GOLD PLATED SURFACE MOUNT, 15u" GOLD

SIZE	PART NO.	REV.
X	2BHR-XX-VUA-SMT-15	-

REF:	SCALE:	SHEET
S00059T	NTS	1 OF 1