

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/15	


APPROVED: _____


DATE: _____ TITLE: _____

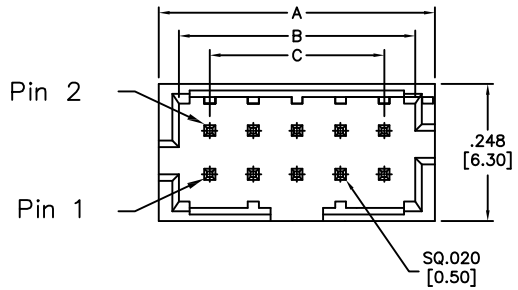


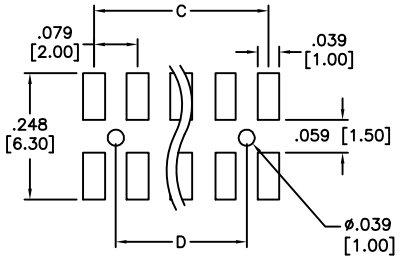

RECOMMENDED PCB LAYOUT

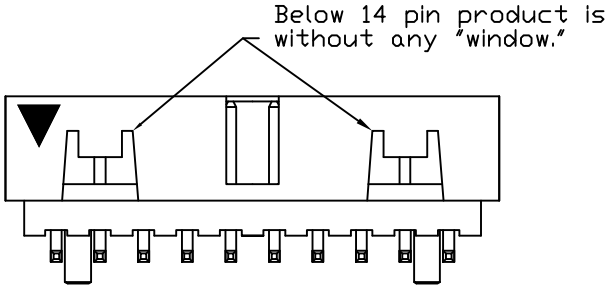

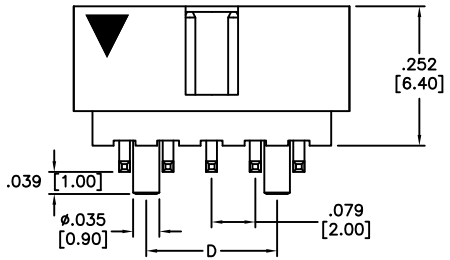

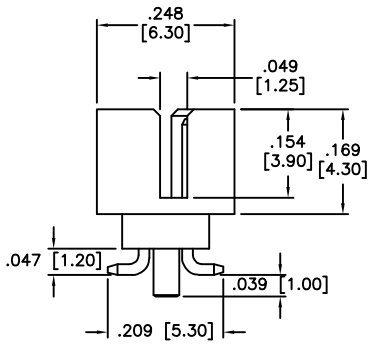

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Contact Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amps max
Contact Resistance: 20 mohms max.
Insulation resistance: 5000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minut
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 260°C for 5 sec.

RoHS COMPLIANT

Positions: 08 thru 20, 24, 26, 28, 34, 40, 44
A = .079 [2.00] x No. of Positions per Row + .104 [2.65]
B = .079 [2.00] x No. of Positions per Row + .033 [0.85]
C = .079 [2.00] x No. of Spaces
D = .079 [2.00] x No. of Spaces - .079 [2.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	3/19/15
CHECKED	NC	3/19/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] BOX HEADER, DUAL ROW, STRAIGHT MOUNT, GOLD PLATED

SIZE	PART NO.	REV.
X	2BHR-XX-VUA-SS-SMT-P	-

REF: S00059T | SCALE: NTS | SHEET 1 OF 1