

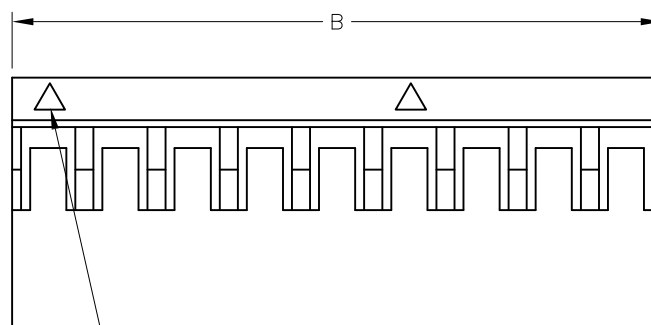


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		DESIGN CHANGE / REDRAWN	7/15/08	
B		REVISED SHAPE	10/08/08	
C		UPDATE SPEC.	6/30/16	AY/NP
D		UPDATE DRAWING	3/13/20	OW/MY

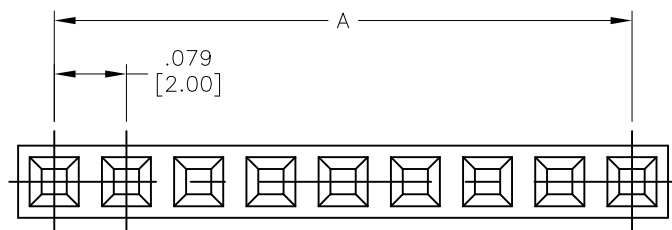

The first triangle mark from the left is PIN1.
 Other triangle marks are for friendly counting uses.

SPECIFICATIONS:

Material:

Insulator: Noryl, rated UL 94V-1

Insulator color: Black

Electrical:

Voltage rating: 250V AC/DC

Current rating: 2A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 01 thru 40

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .087 [2.20]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	4/6/05
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 .079 [2.00] CRIMP HOUSING
 NON-POLARIZED

SIZE X	PART NO. 2CH-A1-XX	REV. D
REF: S00124T	SCALE: NTS	SHEET 1 OF 1