
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/21/15	
A		UPDATE DRAWING	4/20/20	AY/KL

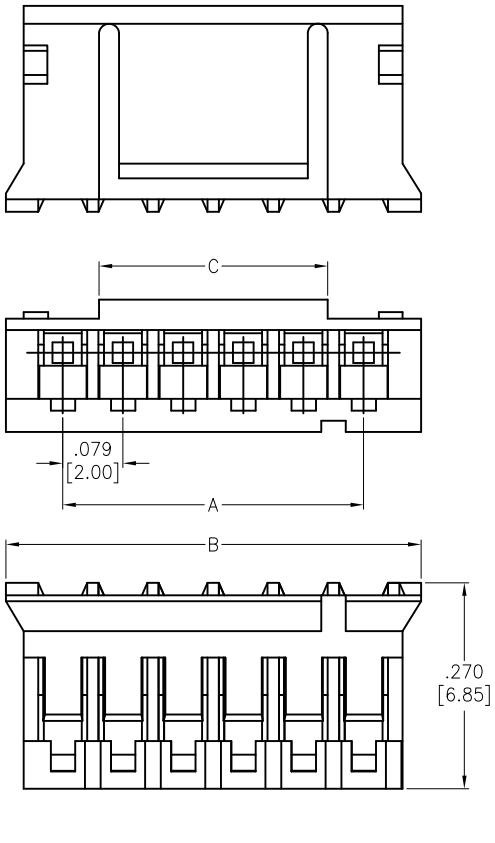

Positions: 2 thru 18
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .150 [3.80]
C = .079 [2.00] x No. of Spaces – .094 [2.40] (04~18P)

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: White
Electrical:
Rated Voltage: 100 V AC/DC
Rated Current: 1.0 A
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/21/15
CHECKED	LW	4/21/15
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] PITCH CRIMP HOUSING

SIZE	PART NO.	REV.
X	2CH-C3-XX-V0	A

REF: S00019C | SCALE: NTS | SHEET 1 OF 1