
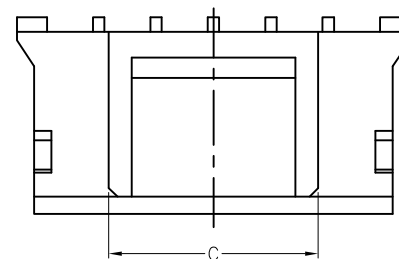
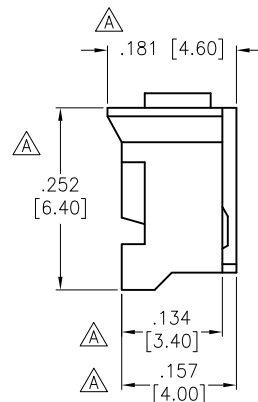




APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/5/18	
A		UPDATE DIM.	11/5/19	AY/EY

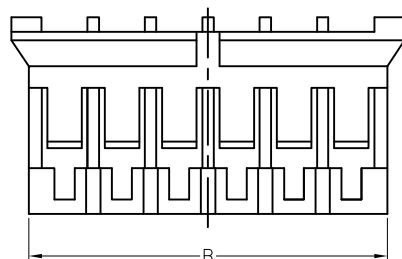

4~16P

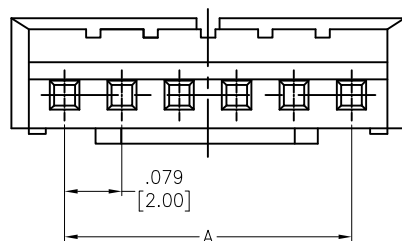

2P



3P

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-2

Electrical:

Voltage rating: 100 VAC/DC rms

Current rating: 2 A @ 24AWG

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Mechanical:

Wire range: 30~24 AWG

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 16

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .098 [2.50] Δ

C = .079 [2.00] x No. of Spaces - .106 [2.70]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	7/5/18
CHECKED	DH	7/5/18
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
.079 [2.00] PITCH CRIMP HOUSING			
SIZE	PART NO.	REV.	
X	2CH-C4-XX	A	
REF:	S00193C	SCALE:	NTS
SHEET 1 OF 1			