
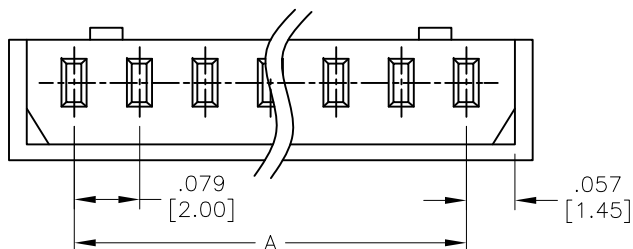
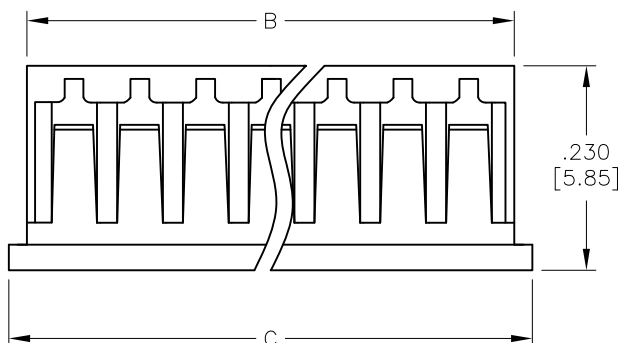
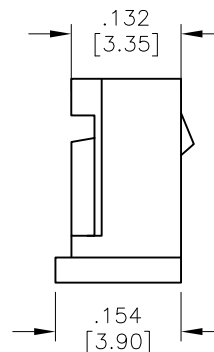


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/23/10	
A		REVISED DIM.	4/16/13	
B		UPDATE DRAWING	5/22/18	AY/MY
C		CURRENT RATING WAS 1.5A	4/13/20	SS
D		UPDATE SPEC.	5/10/23	LH/JL

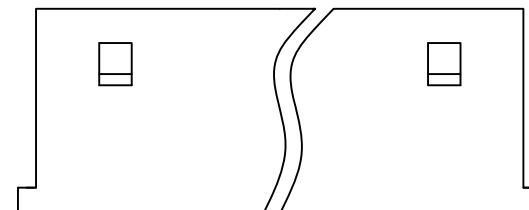

SPECIFICATIONS:

Material:

Insulator: NY66, rated UL 94V-0

Insulator color: Natural

Electrical:

Voltage rating: 125 V

Current rating: 1.5 A

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 15

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .114 [2.90]

C = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	AY	5/10/23
CHECKED	AH	5/10/23
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		.079 [2.00] CRIMP HOUSING	
SIZE	PART NO.	REV.	
X	2CH-F-XX	D	
REF:	S00099T	SCALE:	NTS
SHEET		1 OF 1	