
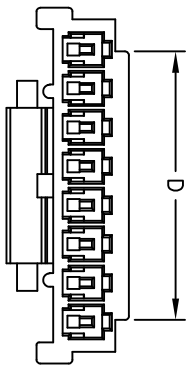
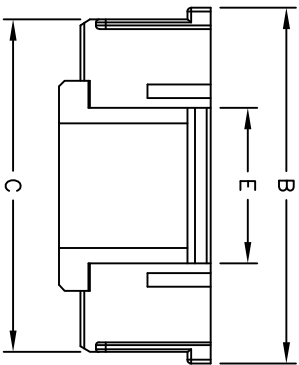





APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/5/10	
A		ADDED PIN NUMBERS	2/10/15	AV/GC

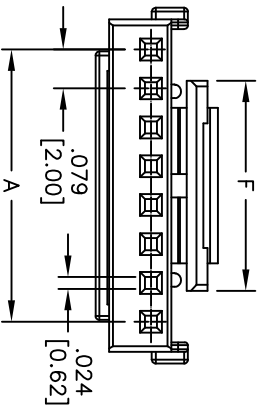

SPECIFICATIONS:

Material:
Insulator: PA66, rated UL 94V-0
Insulator color: White
Electrical:
Operating voltage: 125 VAC/DC
Current rating: 2.0A AC/DC
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant



Positions: 2 thru 20
A = .079 [2.00] x No. of Spaces
B = 2~3P: .079 [2.00] x No. of Spaces + .205 [5.20]
4~20P: .079 [2.00] x No. of Spaces + .169 [4.30]
C = .079 [2.00] x No. of Spaces + .122 [3.10]
D = .079 [2.00] x No. of Spaces - .008 [0.20]
E = 2P: .161 [4.10], 3P: .240 [6.10], 4~7P: [.157 4.00], 8~20P: .315 [8.00]
F = 4~7P: .252 [6.40], 8~20P: .425 [10.80]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				TITLE			
.X	± .10	ØX	± .10	ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710 .079 [2.00] CRIMP HOUSING			
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	AY			11/5/10	SIZE	PART NO.	REV.
CHECKED	AH			11/5/10	X	2CH-G-XX	A
APPROVED					REF:	S00124T	SHEET 1 OF 1