
Rev	AWO #	Description	Date	Appr
-		RELEASED	6/12/18	

APPROVED: _____

DATE: _____ TITLE: _____

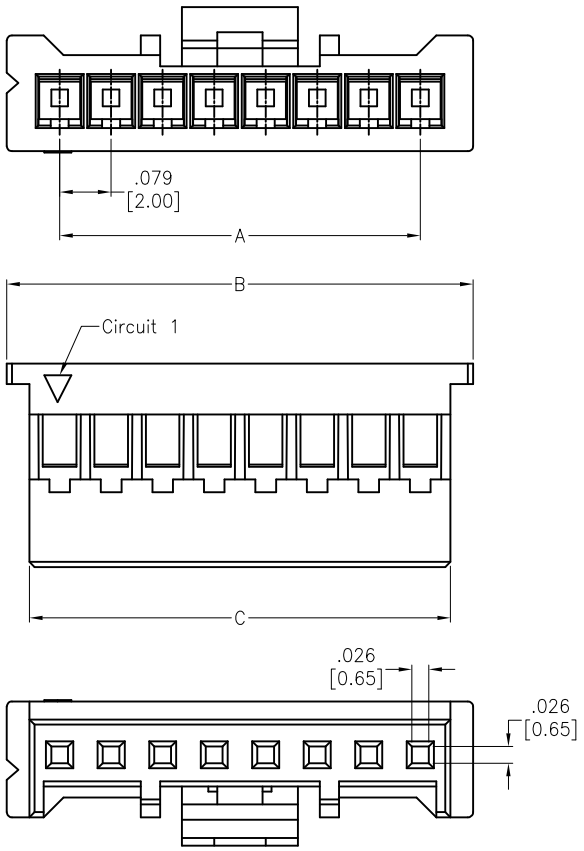

Positions: 2 thru 16
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .161 [4.10]
C = .079 [2.00] x No. of Spaces + .092 [2.34]

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Natural
Electrical:
Voltage rating: 250 VAC/DC
Current rating: 3A AC/DC
Contact resistance: 10 mohms max
Insulation resistance: 1000 Mohms min
After environmental testing: 20 mohms max
Withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/12/18
CHECKED	MY	6/12/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] CRIMP HOUSING

SIZE	PART NO.	REV.
X	2CH-HB-XX	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1