

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/27/21	
A		UPDATE SPEC.	9/24/21	WX/TY
B		UPDATE DRAWING	5/17/22	LH/TY
C		UPDATE SPEC.	9/8/22	WX/TY







IN CASE OF 2 CIRCUIT HSG.




IN CASE OF 3 CIRCUIT HSG.

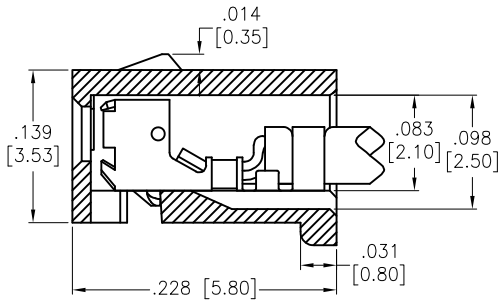

TERMINAL ASSEMBLY DRAWING

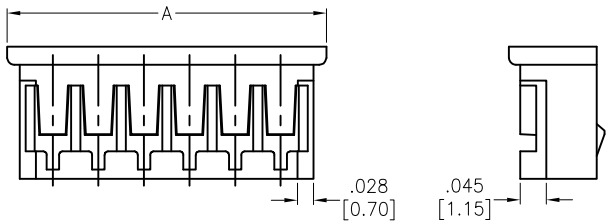

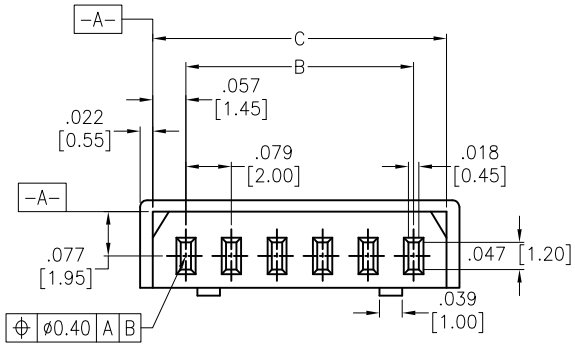

Positions: 03. 04

A = .079 [2.00] x No. of Positions + .079 [2.00]

B = .079 [2.00] x No. of Spaces

C = .079 [2.00] x No. of Spaces + .114 [2.90]

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: White

Electrical:

Current rating: 2A (C)

Contact resistance: 30 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500V AC/DC

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	WX	8/27/21
CHECKED	TY	8/27/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] CRIMP HOUSING LOW PROFILE, POLARIZED

SIZE	PART NO.	REV.
X	2CH-P-XX	C

REF:	SCALE:	SHEET
S00181C	NTS	1 OF 1