
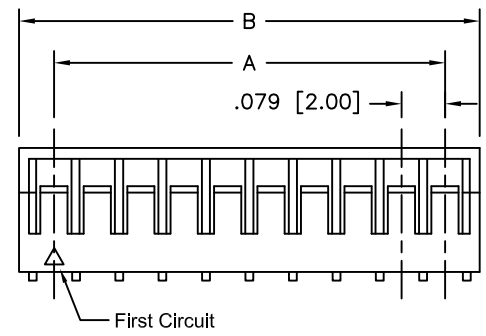

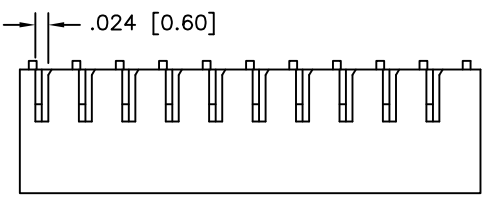
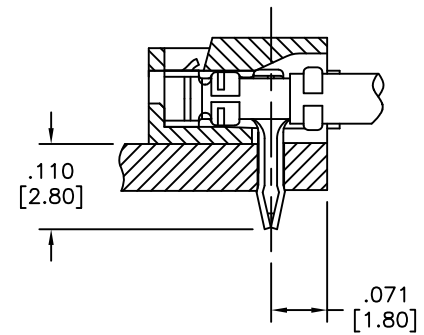


654321



RevAWO #DescriptionDateAppr
-RELEASED12/2/15SS
AUPDATE DIM.9/26/17AY/MY

APPROVED: _____
DATE: _____ TITLE: _____



MATED DRAWING (REF) USE WITH ADAM TECH TERMINAL 2CTZR1-XX-R

POLES	DIMENSION		INCH./MM	
	A		B	
2	.079 [2.00]		.205 [5.20]	
3	.157 [4.00]		.283 [7.20]	
4	.236 [6.00]		.362 [9.20]	
5	.315 [8.00]		.441 [11.20]	
6	.394 [10.00]		.520 [13.20]	
7	.472 [12.00]		.598 [15.20]	
8	.551 [14.00]		.677 [17.20]	
9	.630 [16.00]		.756 [19.20]	
10	.709 [18.00]		.835 [21.20]	
11	.787 [20.00]		.913 [23.20]	
12	.866 [22.00]		.992 [25.20]	
13	.945 [24.00]		1.071 [27.20]	
14	1.024 [26.00]		1.150 [29.20]	
15	1.102 [28.00]		1.228 [31.20]	
16	1.181 [30.00]		1.307 [33.20]	

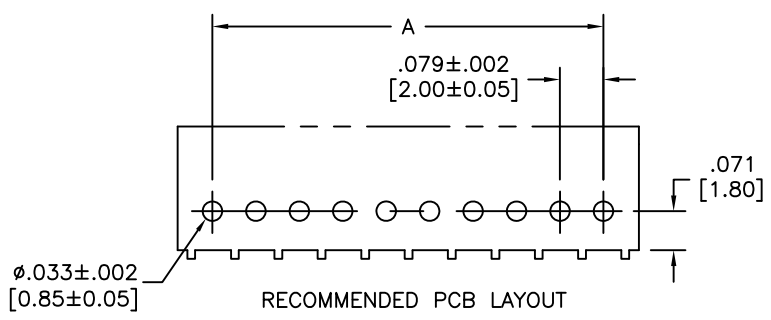

VSPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: White
Electrical:
Current rating: 2A AC/DC
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 800V AC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHESHOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALSDATE
DRAWNSS12/2/15
CHECKED
APPROVED

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] CRIMP HOUSING, RIGHT ANGLE
WIRE TO BOARD

SIZEPART NO. REV.
X2CH-Z1-XX-RAA

REF: S00124TSCALE: NTSHEET 1 OF 1