
Rev	AWO #	Description	Date	Appr
-		RELEASED	10/26/20	

APPROVED: _____

DATE: _____ TITLE: _____

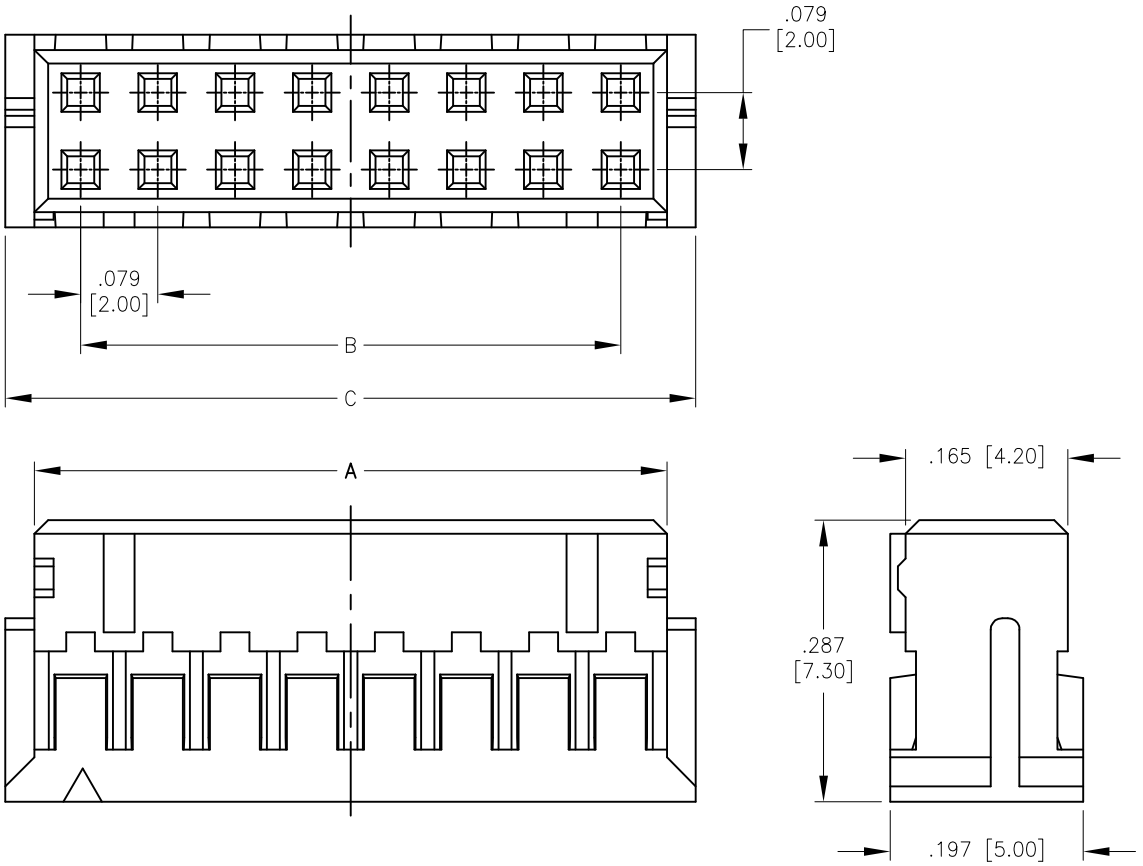

Positions: 04 thru 40
A= .079 [2.00] x No. of Space +.094 [2.40]
B= .079 [2.00] x No. of Space
C= .079 [2.00] x No. of Space +.154 [3.90]

SPECIFICATIONS:
Material:
Housing: PA66, rated UL 94V-0
Insulator color: White
Electrical:
Voltage rating: 250 DC/AC (RMS)
Current rating: 3.0 A (AWG #22)
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute
Mechanical:
Wire: AWG #28~#22
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ANGLE
X.X ± 0.30 ± 3°
X.XX ± 0.25
X.XXX ± 0.10

APPROVALS		DATE
DRAWN	LH	10/26/20
CHECKED	TY	10/26/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] HOUSING

SIZE	PART NO.	REV.
X	2CHD-C3-XX-V0	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1