


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/19/15	
A		UPDATE DIM.	12/9/16	AY/MY

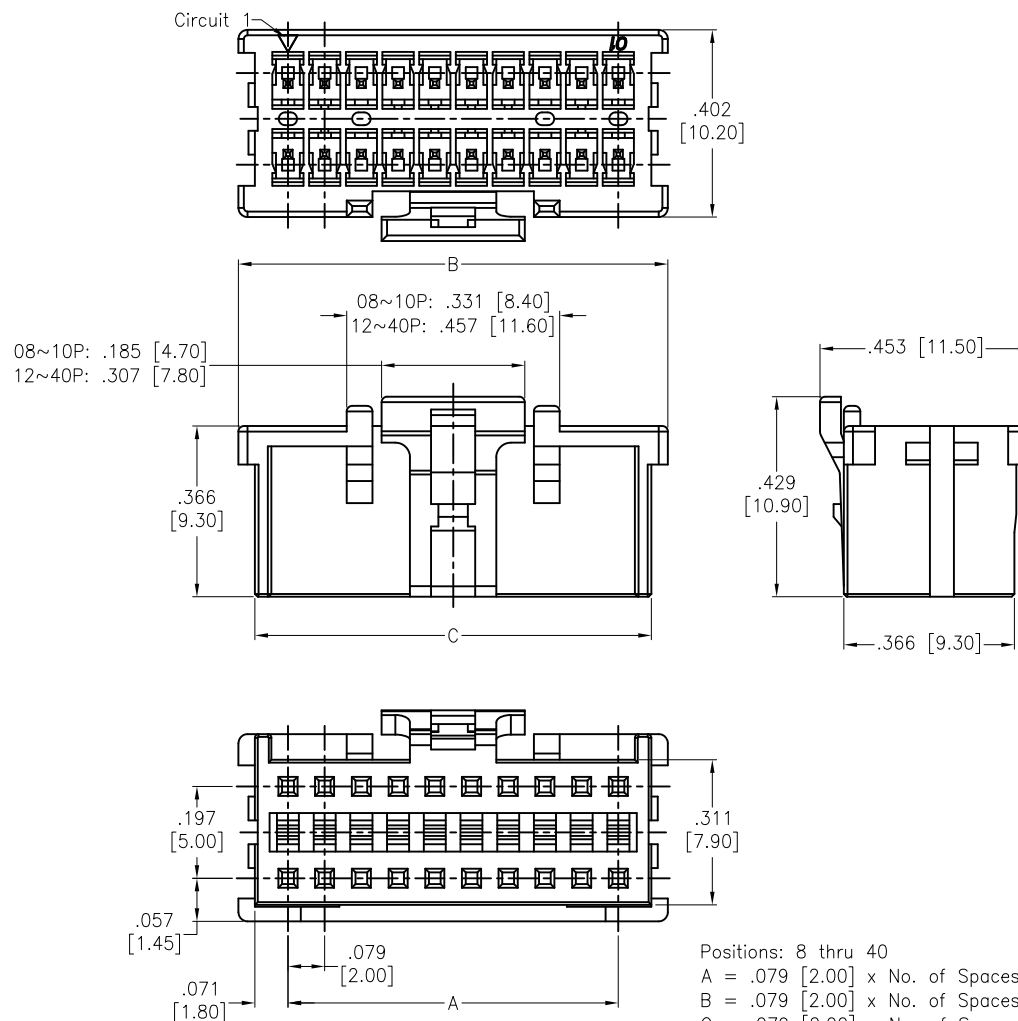

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-0

Insulator color: White

Electrical:

Current rating: 3.0 A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 8 thru 40

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .213 [5.40]

C = .079 [2.00] x No. of Spaces + .142 [3.60]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	5/19/15
CHECKED	SC	5/19/15
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE			
.079 [2.00] CRIMP HOUSING			
SIZE	PART NO.	REV.	
X	2CHD-E-XX	A	
REF:	S00124T	SCALE:	NTS
SHEET 1 OF 1			