

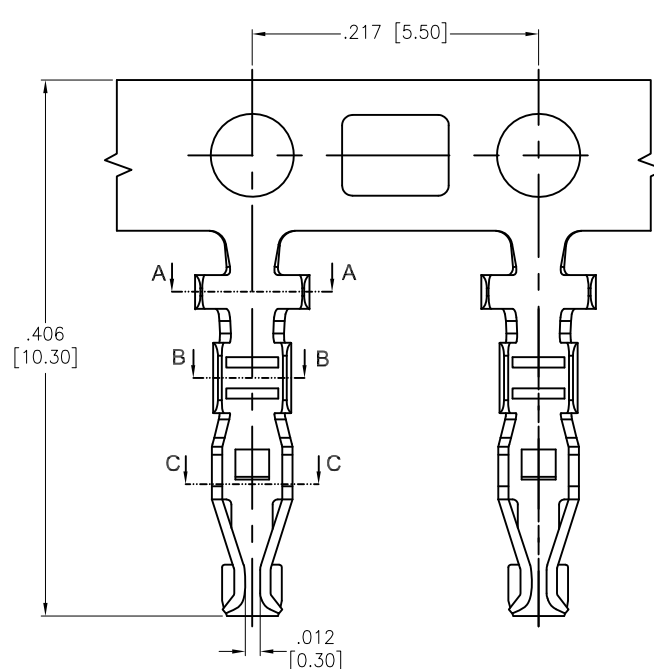
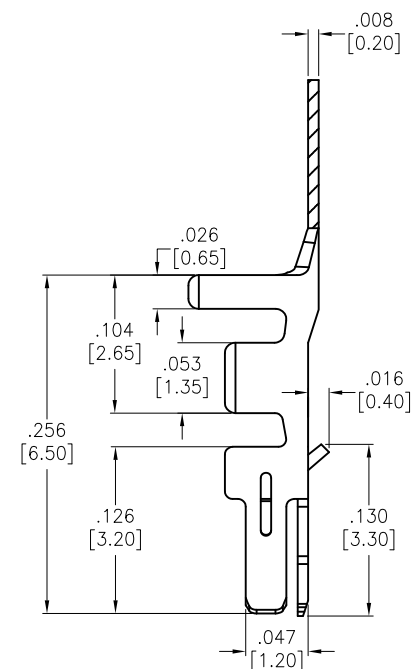


APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/12/18	



SECTION A-A



SECTION B-B



SECTION C-C

SPECIFICATIONS:

Material:

Contact: Phosphor Bronze

Thickness: .008 [0.20mm]

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 250 VAC/DC

Current rating: 3A AC/DC

Contact resistance: 10 mohms max

Insulation resistance: 1000 Mohms min

After environmental testing: 20 mohms max

Withstanding voltage: 800 VAC for 1 minute

Mechanical:

Wire range: 22-28 AWG

Insulation OD: 1.50mm max

Temperature Rating:

-40°C to +125°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE	
DRAWN	AY	6/12/18	
CHECKED	MY	6/12/18	
APPROVED			

ADAM
TECH
 INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE			
.079 [2.00] PITCH CRIMP CONTACT, FOR 2CH-HB			
SIZE	PART NO.	REV.	
X	2CTHB-R	-	
REF:	S00111C	SCALE:	NTS
SHEET 1 OF 1			