




APPROVED: _____
DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/2/19	

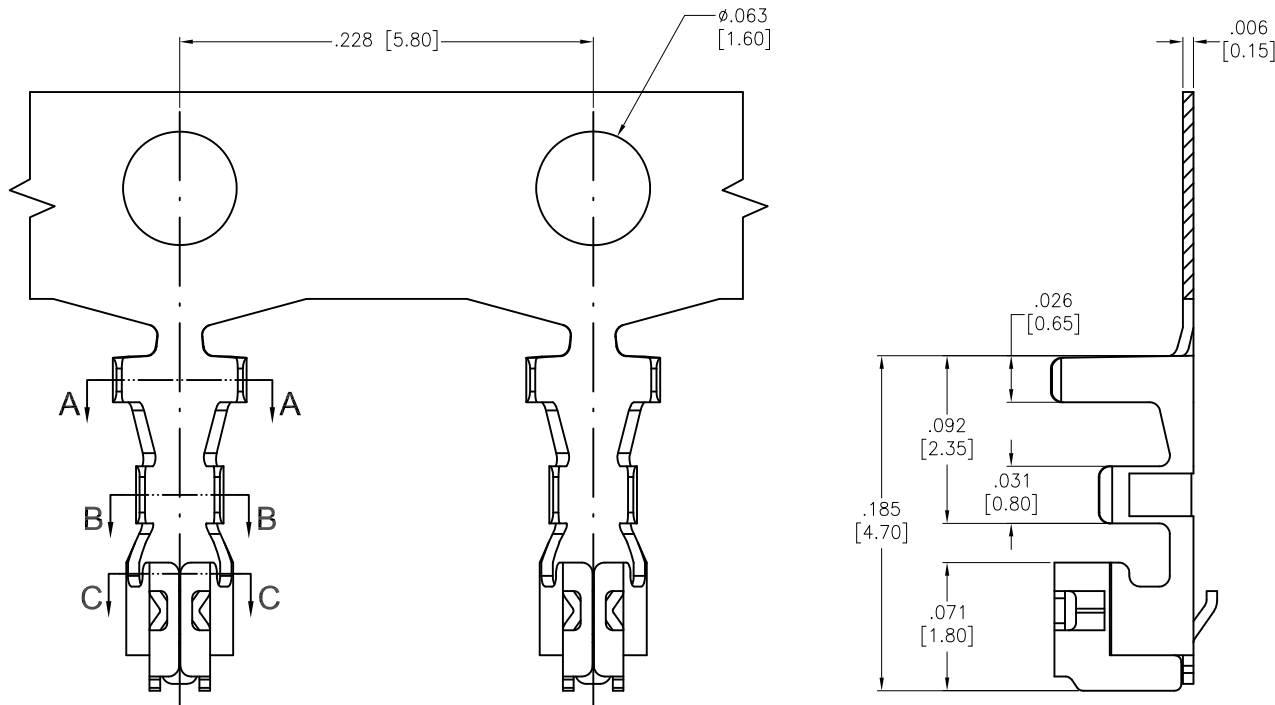

SECTION A-A



SECTION B-B



SECTION C-C

SPECIFICATIONS:

Material:

Contact: Phosphor Bronze

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 125 V AC/DC

Current rating: 3 A AC/DC

Contact resistance: 10 Mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Mechanical:

Insulation O.D: 1.4 mm (Max)

Wire range: 24-30 AWG

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X $\pm .10$ $\phi .X$ $\pm .10$
.XX $\pm .020$ $\phi .XX$ $\pm .015$
.XXX $\pm .015$ $\phi .XXX$ $\pm .010$

APPROVALS		DATE
DRAWN	LH	7/29/19
CHECKED	BC	7/29/19
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
CRIMP CONTACT, FOR 2CH-R-XX			
SIZE X	PART NO. 2CTR-R	REV. -	
REF: S00111C	SCALE: NTS	SHEET 1 OF 1	