
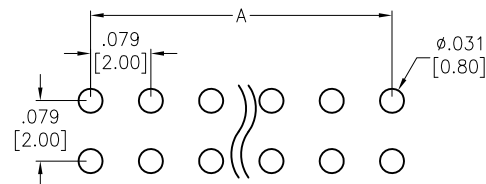





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	8909	RELEASED	12/10/08	
A		REVISED SHAPE	12/4/13	AY/AL

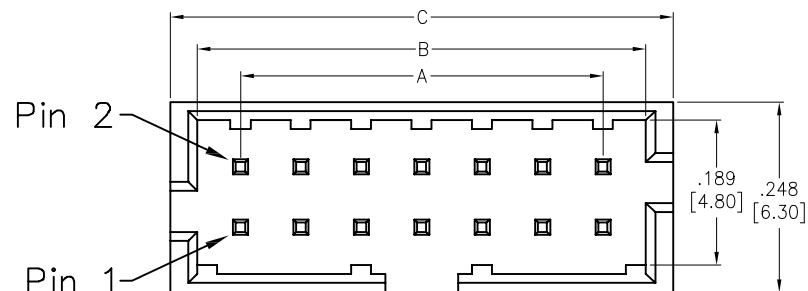

RECOMMENDED PCB LAYOUT

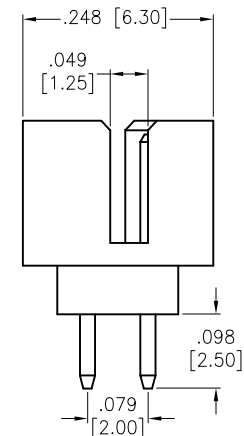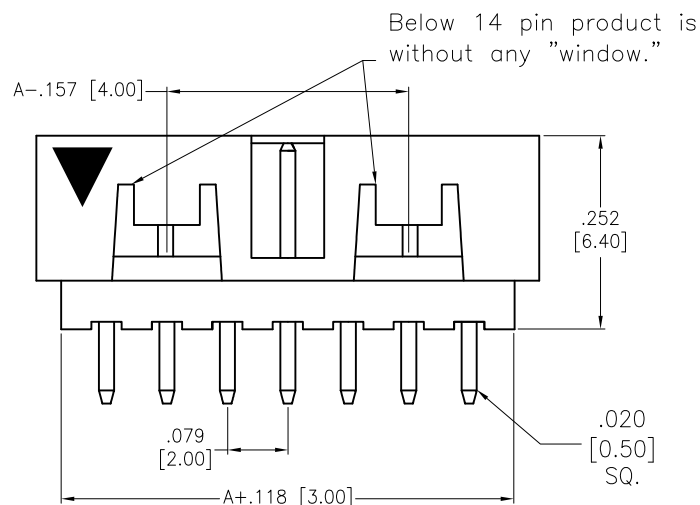

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over nickel underplate overall.

Electrical:

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minut

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 8, 10, 12, 14, 16, 18, 20, 24, 26, 28, 34, 40 & 44

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .112 [2.85]

C = .079 [2.00] x No. of Spaces + .183 [4.65]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	SS	12/10/08
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] MOUNT BOX HEADER, DUAL ROW,
STRAIGHT MOUNT, GOLD PLATED

SIZE	PART NO.	REV.
X	2MBHR-XX-VUA	A
REF:	S00059T	SCALE: NTS
SHEET 1 OF 1		