

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/24/15	
A		REVISED DIM.	4/14/15	AY

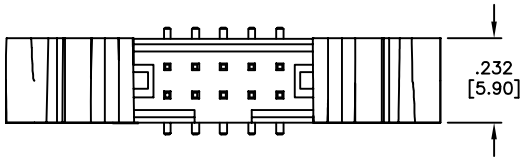



RECOMMENDED PCB LAYOUT

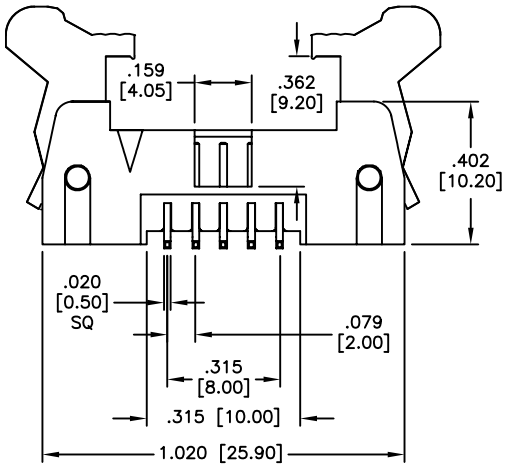



SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate on mating area,
Tin over Copper underplate on solder tails.
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/24/15
CHECKED	KW	2/24/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2MM LATCHING BOX HEADER, VERTICAL, SHORT LATCH, SMT, SEL GOLD PLATED


SIZE	PART NO.	REV.
X	2MHR-10-VSGAS-SMT-T/R	A

REF: S00041T | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

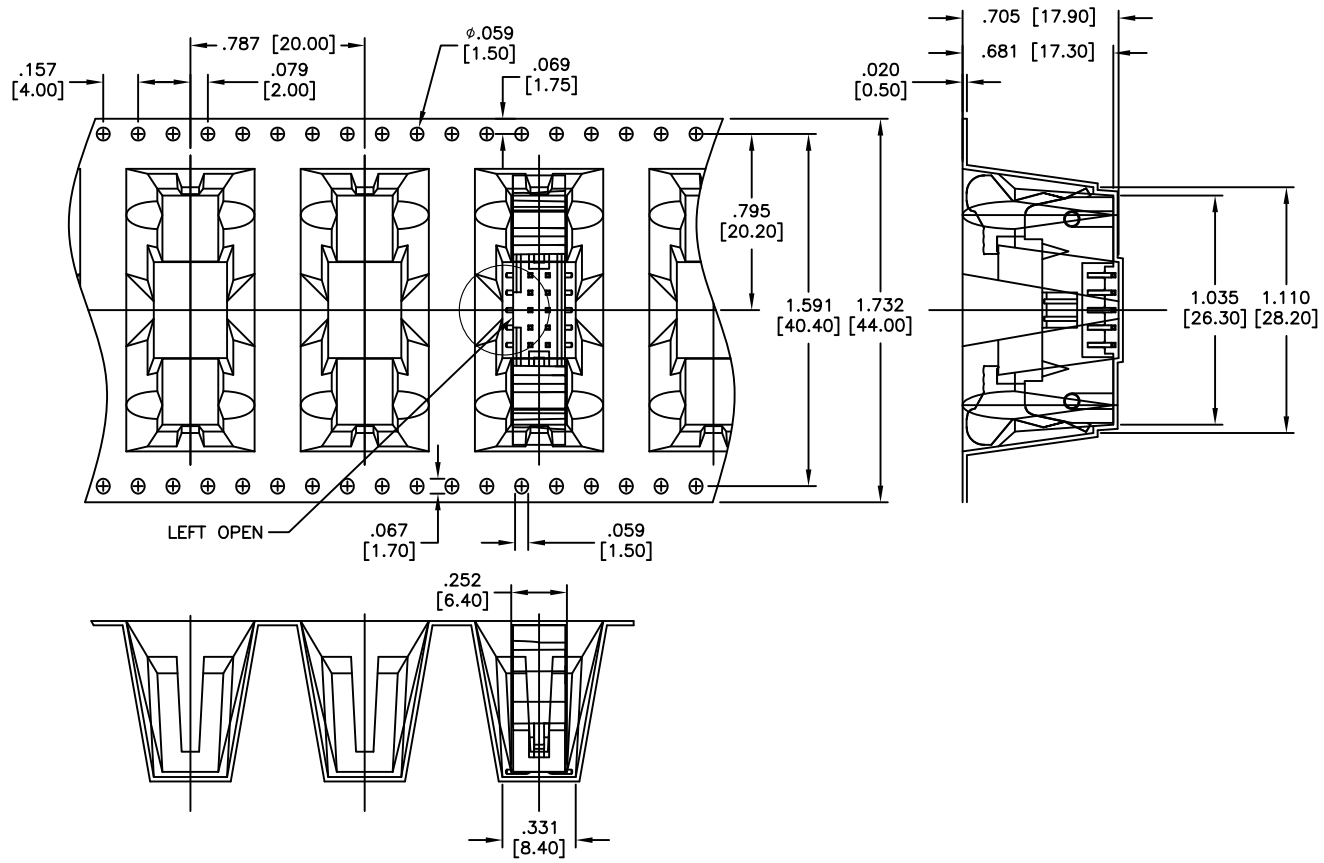

1.MATERIAL: BLACK PS
2.CARRIER CAMBER IS WITHIN 1mm IN 250mm
3.PACKING LENGTH PER 22"REEL: 12.0 METERS
4.COMPONENT LOAD PER 13"REEL: 150 PCS

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/24/15
CHECKED	KW	2/24/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2MM LATCHING BOX HEADER, VERTICAL, SHORT LATCH, SMT, SEL GOLD PLATED

SIZE	PART NO.	REV.
X	2MHR-10-VSGAS-SMT-T/R	A

REF:	SCALE:	SHEET
S00041T	NTS	2 OF 2