

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/8/16	


APPROVED: _____

DATE: _____ TITLE: _____

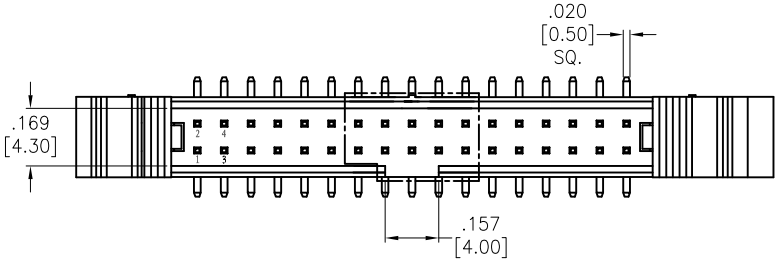


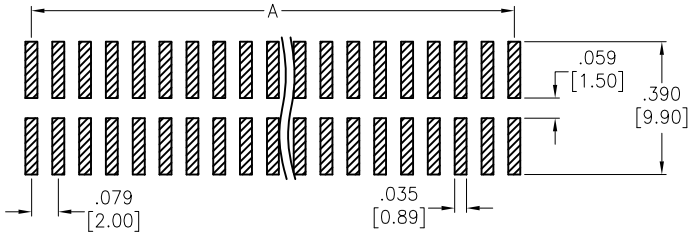



RECOMMENDED PCB LAYOUT



Short Latch
L=.669 [17.00]
L1=.201 [5.10]
2MHR-B-XX-VUAS-SMT-PP-T/R

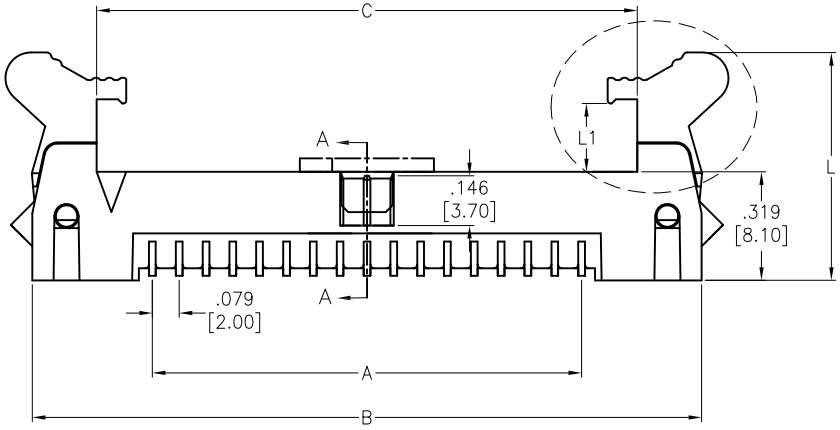





Long Latch
L=.821 [20.85]
L1=.352 [8.95]
2MHR-B-XX-VUAL-SMT-PP-T/R

PACKAGED ON TAPE & REEL

Positions: 08, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 64, 68
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Positions per row + .626 [15.90]
C = .079 [2.00] x No. of Positions per row + .248 [6.30]

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 2.0 Amps
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 500 VAC/DC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/8/16
CHECKED	YC	6/8/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: LATCHED BOX HEADER, VERTICAL, SMT WITH CUSTOMIZED LATCHES, GOLD PLATED

SIZE	PART NO.	REV.
X	2MHR-B-XX-VUAX-SMT-PP-T/R	-

REF: S00019C | SCALE: NTS | SHEET 1 OF 1