

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/15/19	
A		UPDATE DRAWING	10/6/21	WX/RT


APPROVED: _____

DATE: _____ TITLE: _____

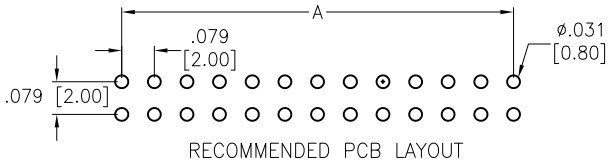


RECOMMENDED PCB LAYOUT

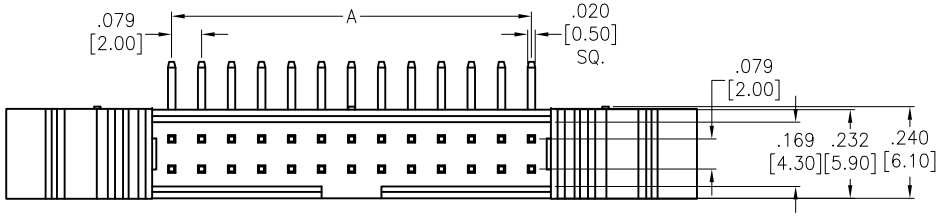


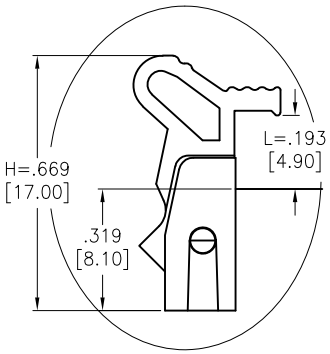


2MHR-B1-XX-HUAS-HT

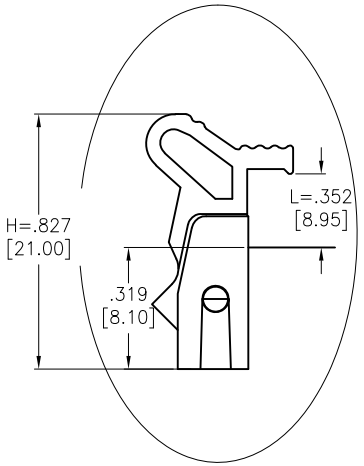

2MHR-B1-XX-HUAL-HT

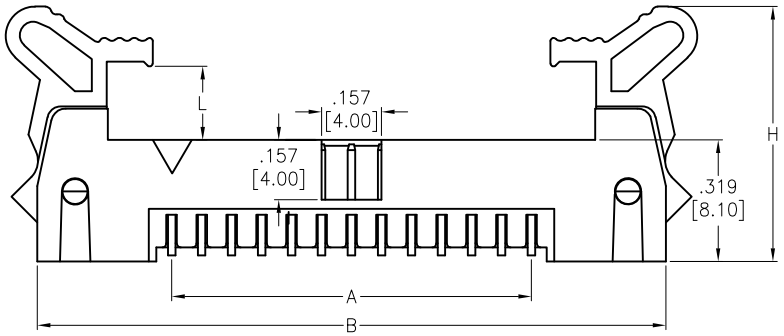



SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 2 Amp
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Positions: 06 thru 64
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Positions per row + .626 [15.92]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	HR	1/15/19
CHECKED	DH	1/15/19
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: LATCHED BOX HEADER, RIGHT ANGLE, PCB WITH CUSTOMIZED LATCHES, GOLD PLATED

SIZE	PART NO.	REV.
X	2MHR-B1-XX-HUAX-HT	A

REF: S00111C | SCALE: NTS | SHEET 1 OF 1