

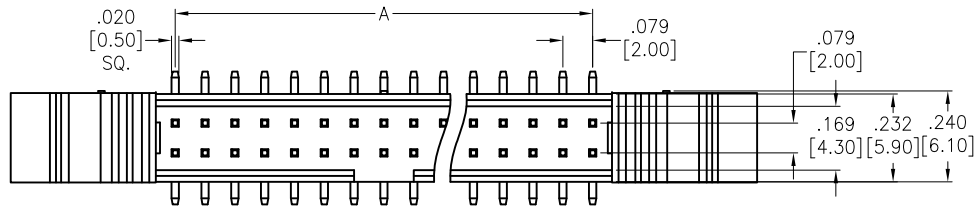
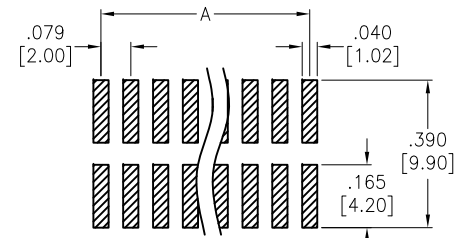


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/2/20	

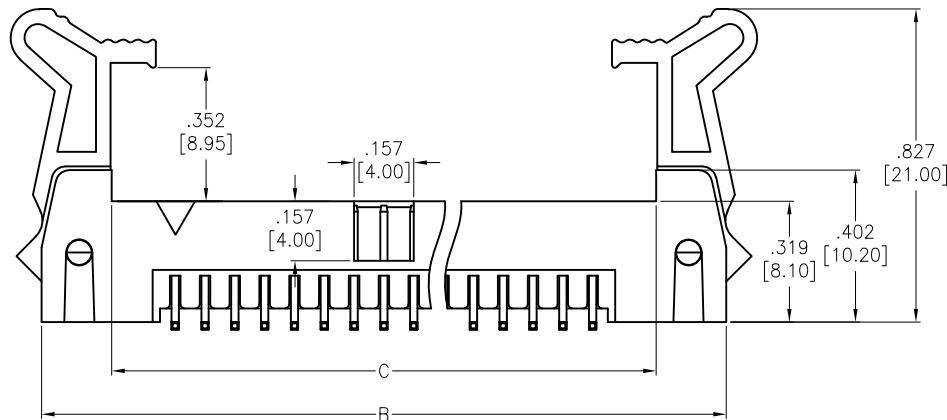

RECOMMENDED PCB LAYOUT

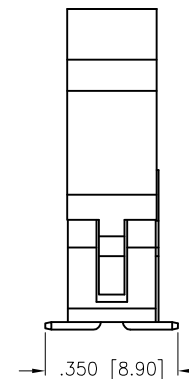

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 2.0 Amp
 Contact resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC For 1 Minute
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 06 thru 64

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Positions per row + .627 [15.92]

C = .079 [2.00] x No. of Positions per row + .248 [6.30]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DRAWN LH

CHECKED JL

APPROVED

DATE

12/2/20

12/2/20

ADAM
TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE LATCHED BOX HEADER, VERTICAL, SMT
 WITH LONG LATCHES, GOLD PLATED

SIZE X PART NO. 2MHR-B1-XX-VUAL-SMT REV. -

REF: S00111C SCALE: NTS SHEET 1 OF 1