

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/19	
A		UPDATE DIM B	4/15/22	LH/TY

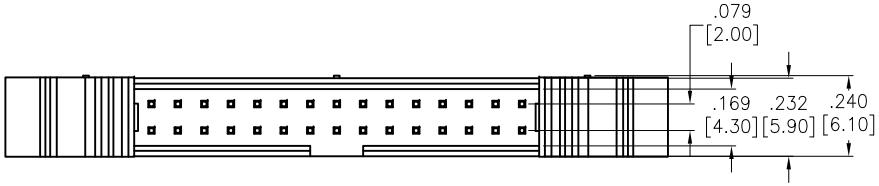


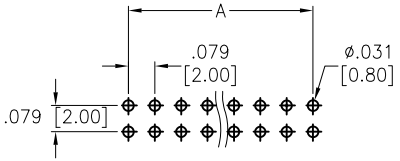



RECOMMENDED PCB LAYOUT

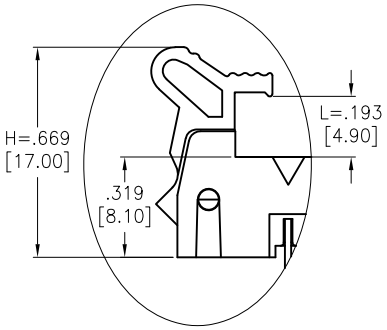

2MHR-B1-XX-VUAS-HT

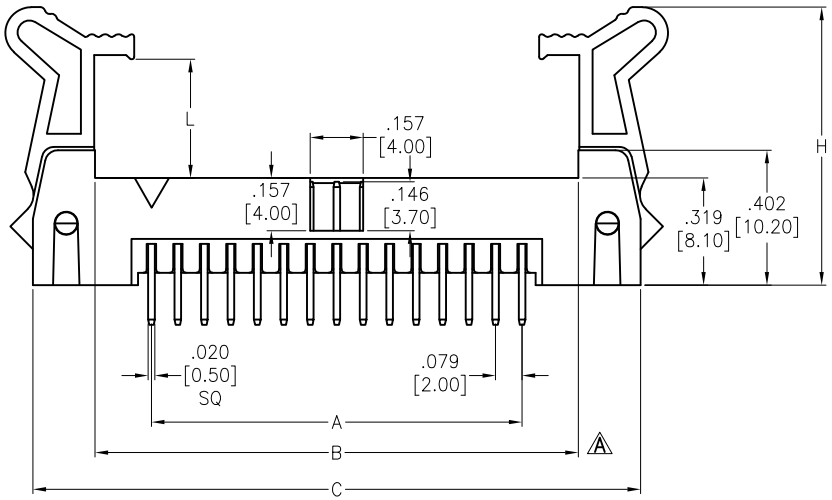



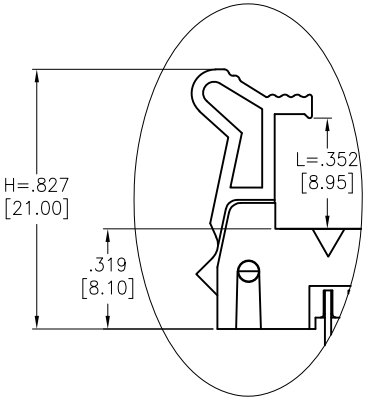

2MHR-B1-XX-VUAL-HT

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 2 Amp
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 06, 08, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Positions per row + .248 [6.30]
C = .079 [2.00] x No. of Positions per row + .626 [15.90]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	AY	11/26/19
CHECKED	AC	11/26/19
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

TITLE: LATCHED BOX HEADER, VERTICAL, PCB, WITH CUSTOMIZED LATCHES, GOLD PLATED

SIZE	PART NO.	REV.
X	2MHR-B1-XX-VUAX-HT	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1