


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/17	


APPROVED: _____

DATE: _____ TITLE: _____



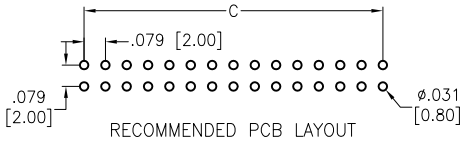

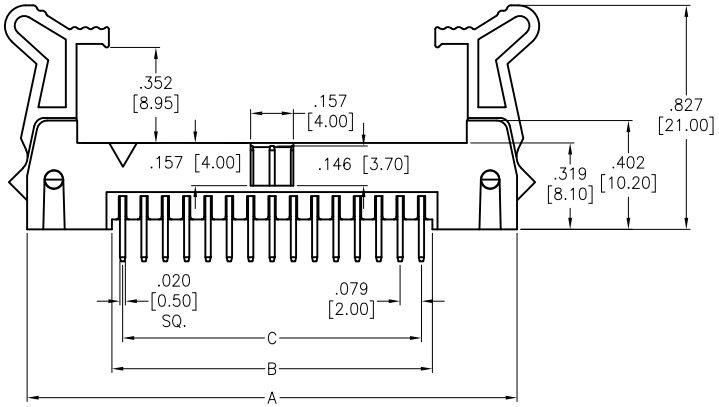



Positions: 06 thru 64
A= .079 [2.00] x No. of Positions per Row + .627 [15.92]
B= .079 [2.00] x No. of Positions per Row + .248 [6.30]
C= .079 [2.00] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 2 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	6/22/17
CHECKED	MY	6/22/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] SHROUDED HEADER W/ LONG LATCHES, VERTICAL, 2 ROW, GOLD PLATED

SIZE	PART NO.	REV.
X	2MHR-XX-VUAL	-

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1