

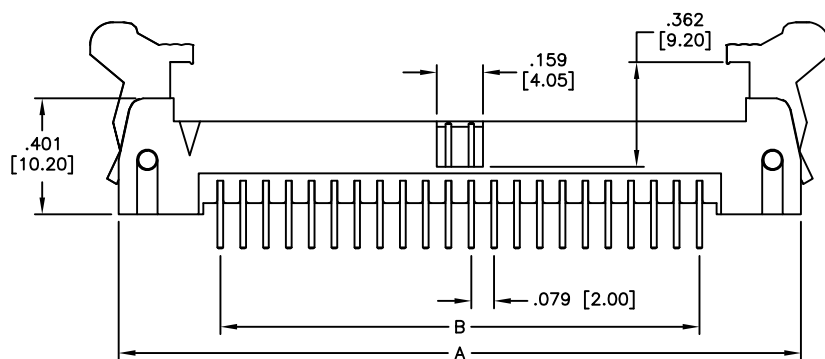
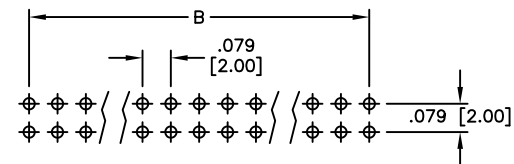


6 5 4 3 2 1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/26/06	
A		UPDATED DIM.	4/14/15	HR/GC

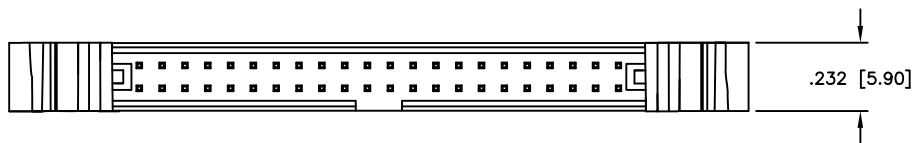

Number Of Position	DIMENSIONS	
	A	B
10	1.02 [25.90]	.315 [8.0]
12	1.098 [27.90]	.393 [10.0]
14	1.177 [29.90]	.472 [12.0]
16	1.256 [31.90]	.551 [14.0]
20	1.413 [35.90]	.709 [18.0]
22	1.492 [37.90]	.787 [20.0]
24	1.571 [39.90]	.886 [22.0]
26	1.650 [41.90]	.945 [24.0]
30	1.807 [45.90]	1.102 [28.0]
32	1.885 [47.90]	1.181 [30.0]
34	1.964 [49.90]	1.260 [32.0]
40	2.200 [55.90]	1.496 [38.0]
44	2.358 [59.90]	1.654 [42.0]
50	2.594 [65.90]	1.890 [48.0]
60	2.988 [75.90]	2.280 [58.0]

NOTE: LONG LATCH FOR USE WITH IDC SOCKET
WITHOUT STRAIN RELIEF

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amps max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40C to +85C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN SS 1/26/06

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
2MM LATCHING BOX HEADER, VERTICAL,
SHORT LATCH, PCB, GOLD PLATED

SIZE X PART NO. 2MHR-XX-VUAS REV. A

REF: S00041T SCALE: NTS SHEET 1 OF 1