

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/05	

APPROVED: _____

DATE: _____ TITLE: _____

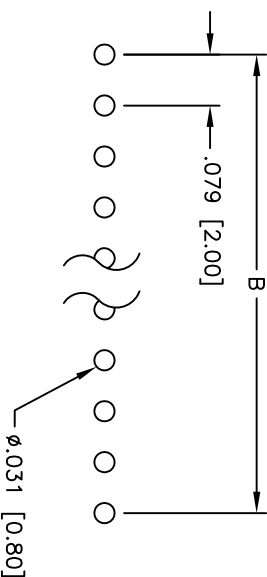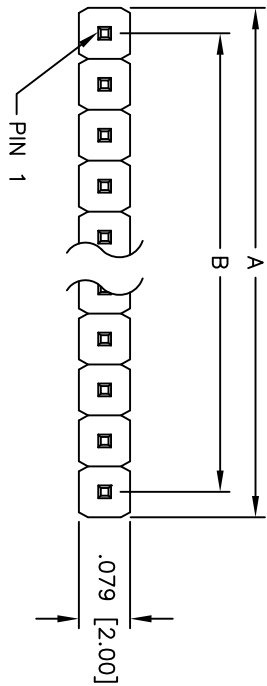

RECOMMENDED
PCB LAYOUT

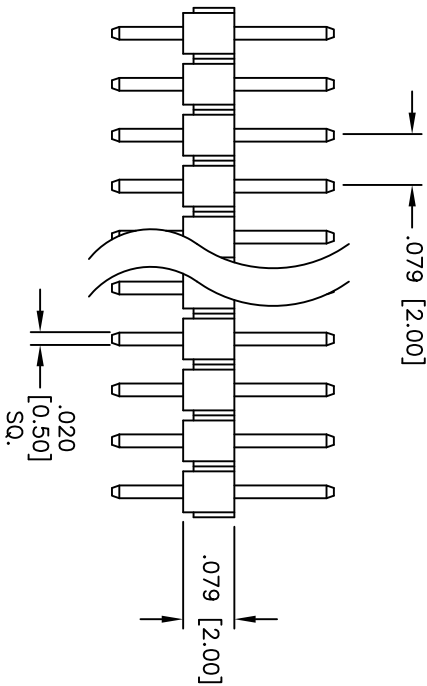

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Temperature Rating: Operating temperature: -55°C to +105°C
Environmental: Lead free, RoHS compliant

Positions: 2 thru 40
A = .079 [2.00] x No. of Positions
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10 .XX ± .020 .XXX ± .015	ØX ± .10 ØXX ± .015 ØXXX ± .010	TITLE .079 [2.00] SINGLE ROW PIN HEADER GOLD FLASH PLATED, HI TEMP	
APPROVALS	DATE		
DRAWN	SS	3/31/05	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	2PH1-XX-UA-HT	-	
REF:	SCALE: NTS	SHEET 1 OF 1	

A

B

C

D

A

B

C

D

6

5

4

3

2

1