

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	5/10/10	

APPROVED: _____

DATE: _____ TITLE: _____

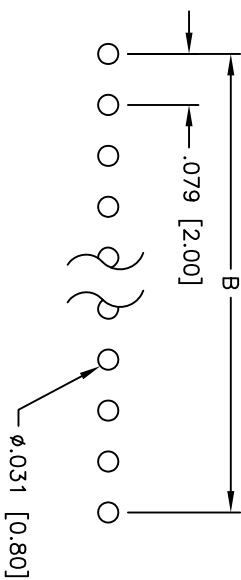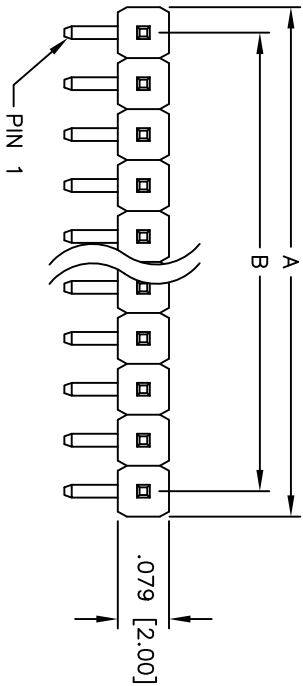

RECOMMENDED
PCB LAYOUT

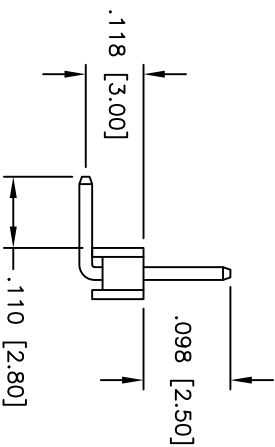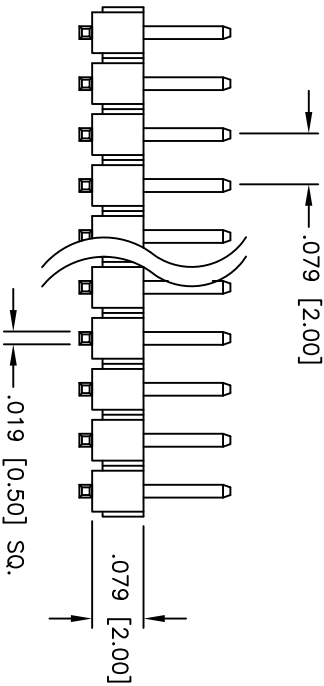

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



Positions: 1 thru 40
A = .079 [2.00] x No. of Positions
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

.X ± .10 ØXX ± .10
.XX ± .020 ØXXX ± .015
.XXX ± .015 ØXXXX ± .010

APPROVALS

DATE

DRAWN DY 5/10/10

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE .079 [2.00] SINGLE ROW PIN HEADER

RIGHT ANGLE, TIN PLATED

SIZE X PART NO. 2PH1R-XX-1-.098 REV. -

REF: S00039T SCALE: NTS SHEET 1 OF 1