

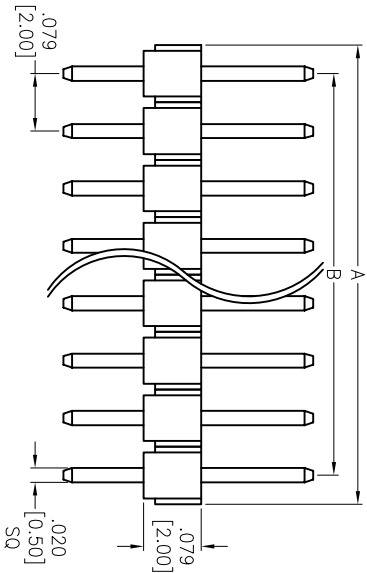
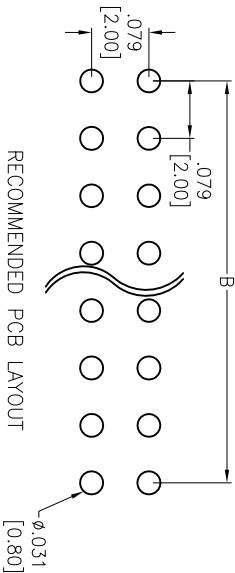


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/05	
A		REVISED DIM.	02/22/13	

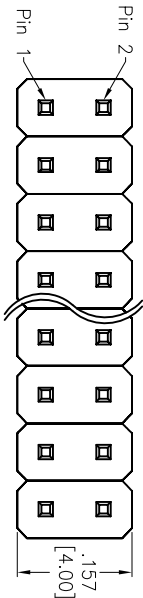

SPECIFICATIONS:

Material:
Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

Positions: 2 thru 80
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
HOLES				TITLE			
.X	± .10	ØX	± .10	.079 [2.00] DUAL ROW PIN HEADER			
.XX	± .020	ØXX	± .015	TIN PLATED			
.XXX	± .015	ØXXX	± .010				
APPROVALS			DATE				
DRAWN	SS	3/31/05		SIZE		PART NO.	
CHECKED				X		2PH2-XX-1A	
APPROVED				REF: S00059T		SCALE: NTS	SHEET 1 OF 1
						REV. A	