


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/15/08	

APPROVED: _____


DATE: _____ TITLE: _____

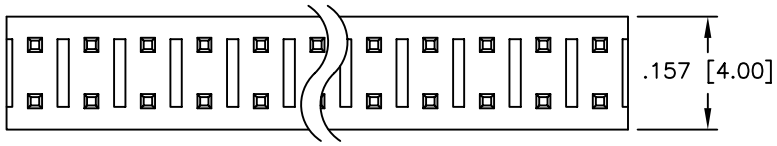

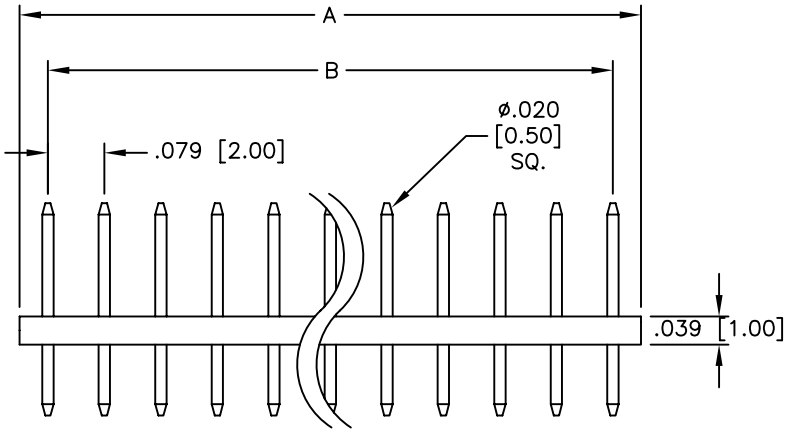

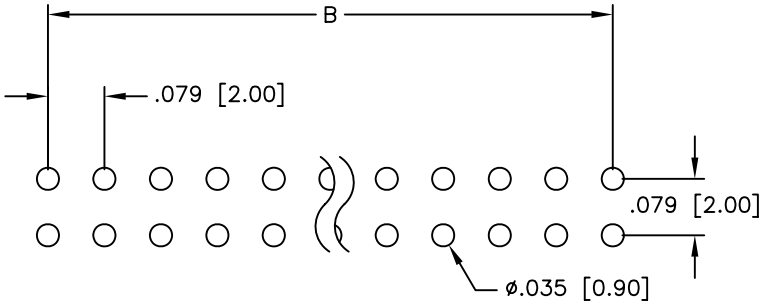

Recommended PCB Layout

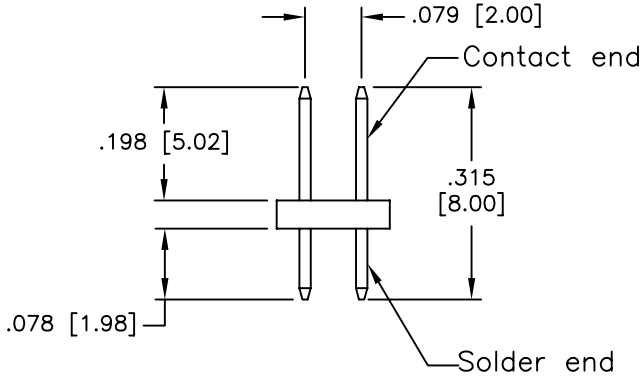

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall.
Electrical:
Operating voltage: 250 VAC max
Current rating: 1 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

Positions: 6 thru 80
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	7/15/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] DUAL ROW PIN HEADER, DIP TYPE, ULTRA LOW, GOLD PLATED

SIZE	PART NO.	REV.
X	2PH2-XX-U-.078/.315-UL	-

REF: | SCALE: NTS | SHEET 1 OF 1