

6

5

4

3



2

1



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/21	

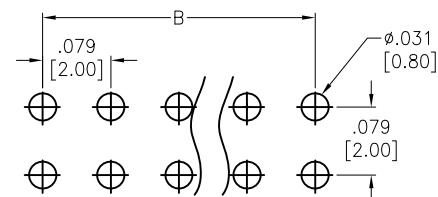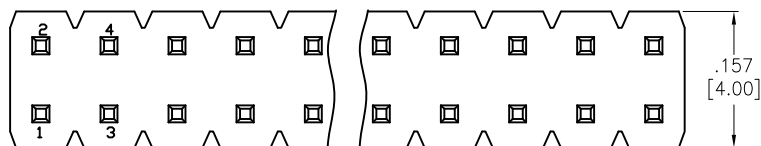

RECOMMENDED PCB LAYOUT

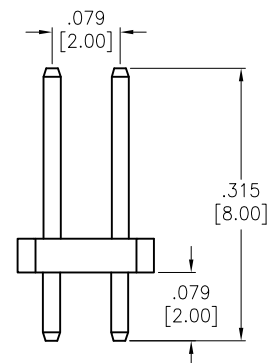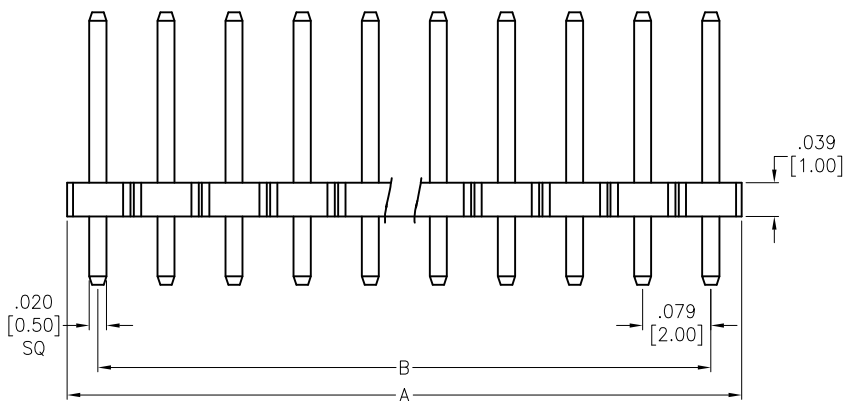

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC For 1 Minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 03 thru 40

A= .079 [2.00] x No. of Positions per Row

B= .079 [2.00] x No. of Space

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

DRAWN	LH	4/12/21
CHECKED	NL	4/12/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH
ADAM
TECH

 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

 TITLE
 .079 [2.00] DUAL ROW PIN HEADER,
 DIP TYPE, ULTRA LOW, GOLD PLATED

SIZE X	PART NO. 2PH2-XX-U-.079/.315-UL-Y	REV. -
REF: S00111C	SCALE: NTS	SHEET 1 OF 1