
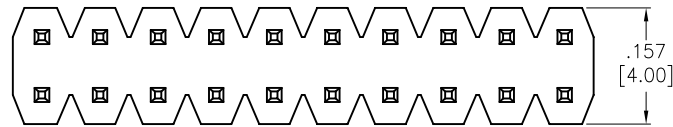




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/23/24	

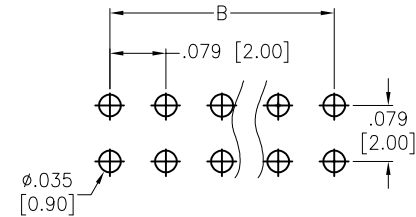

RECOMMENDED PCB LAYOUT

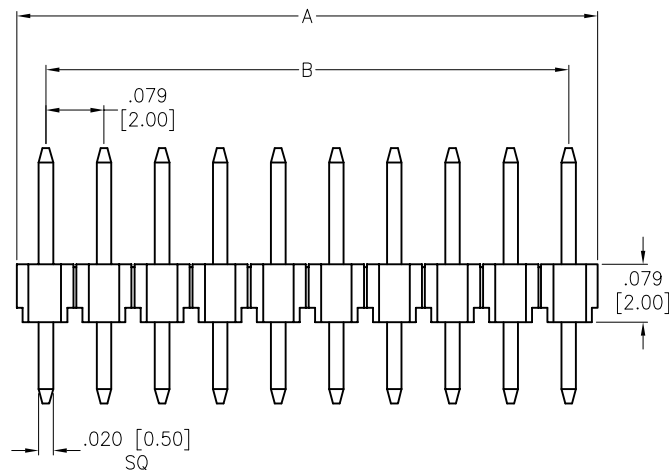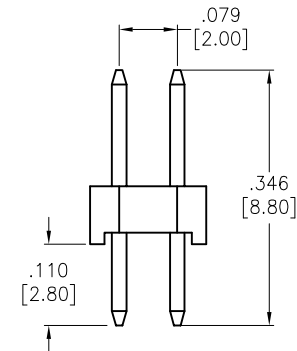

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 80

$$A = .079 [2.00] \times \text{No. of Positions per row}$$
$$B = .079 [2.00] \times \text{No. of Spaces}$$

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED			<div><div>ADAM TECH</div><div>909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710</div></div>		
<div><div>INCHES</div><div><div>.X ± .10</div><div>.XX ± .020</div><div>.XXX ± .015</div></div><div>HOLES</div><div><div>Ø.X ±.10</div><div>Ø.XX ±.015</div><div>Ø.XXX ±.010</div></div></div>			TITLE		
DRAWN	JJ	4/23/24	.079 [2.00 DUAL ROW PIN HEADER		
CHECKED	JL	4/23/24	PCB TYPE, GOLD PLATED , HI-TEMP		
APPROVED			SIZE		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			PART NO.		REV.
			X		-
REF:			S00032T	SCALE: NTS	SHEET 1 OF 1