

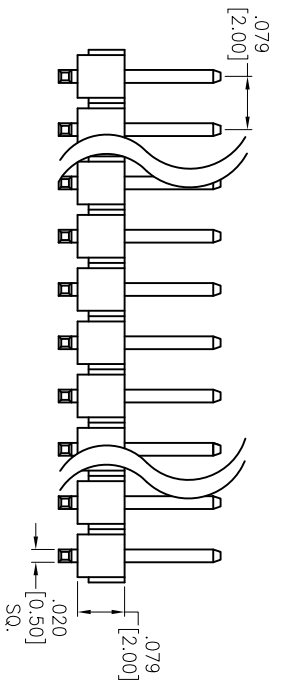
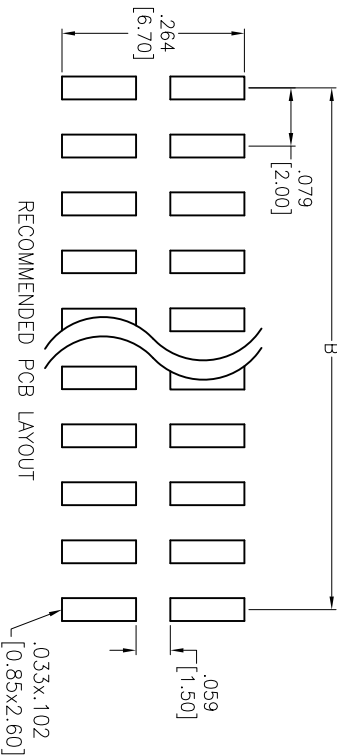


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	-	RELEASED	4/1/05	
A	-	REVISED SHAPE	9/24/13	AY/NP

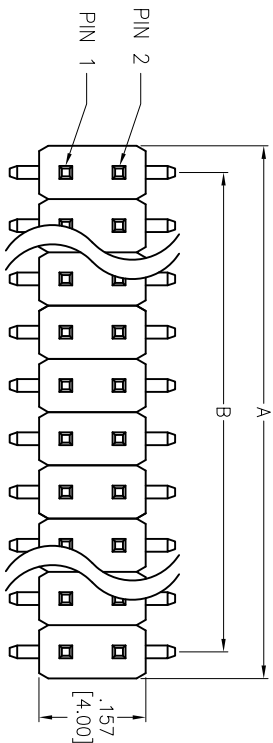

SPECIFICATIONS:

Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

PACKAGED ON TAPE & REEL

Positions: 04 thru 80
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØX	± .10	TITLE [.079 [2.00]] DUAL ROW PIN HEADER SURFACE MOUNT, GOLD FLASH			
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN				SS			
CHECKED				4/1/05			
APPROVED				X			
SIZE				PART NO.			
X				2PH2-XX-UA-SMT			
REF:				S00039T			
SCALE:				NTS			
SHEET				1 OF 1			