

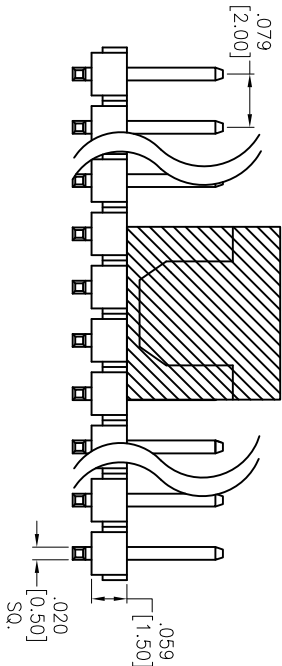
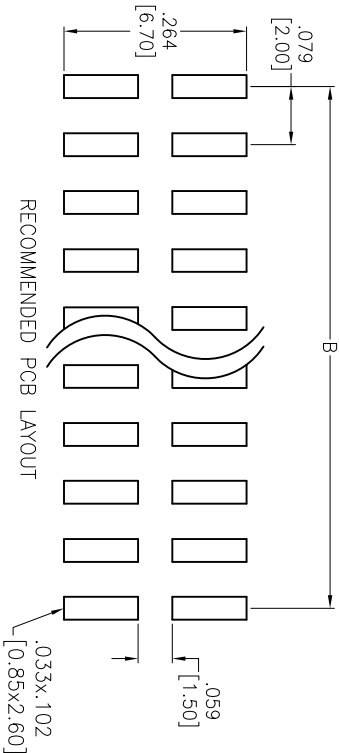


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/18/15	
A		UPDATE DRAWING	7/17/17	AY

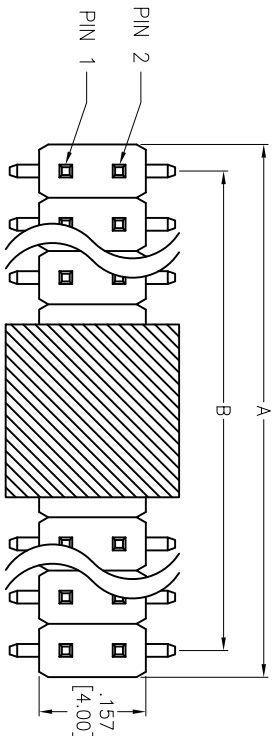

SPECIFICATIONS:

Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1 Amp
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant

PACKAGED ON TAPE & REEL
Positions: 2 thru 80
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØX	± .10	TITLE .079 [2.00] DUAL ROW PIN HEADER SURFACE MOUNT, LOW PROFILE, WITH CAP			
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	AY		9/18/15	SIZE PART NO. REV.			
CHECKED	LW		9/18/15				
APPROVED							
REF:	S00059T	SCALE: NTS	SHEET 1 OF 1	X 2PH2-XX-UA-SMT-L-PP-T/R A			