

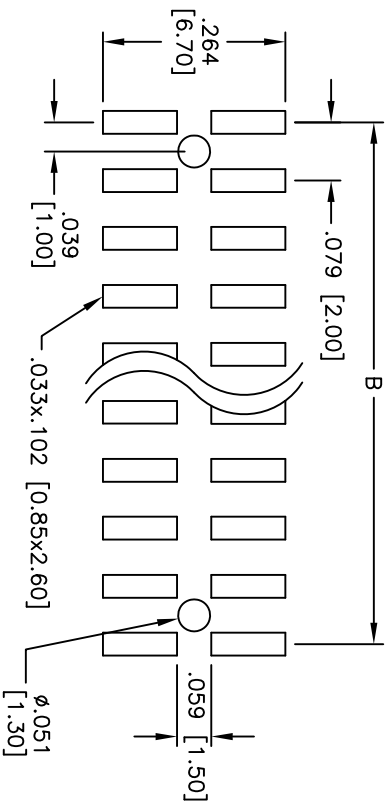
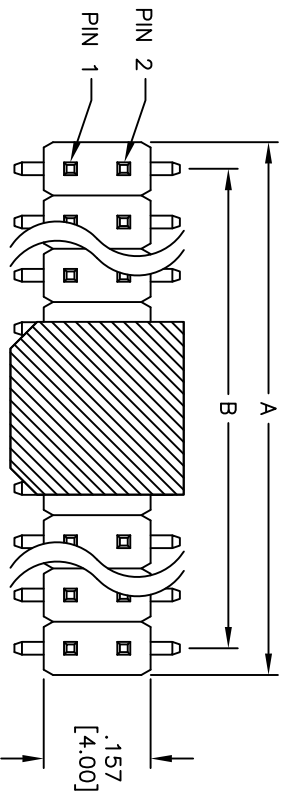


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/7/13	
A		UPDATED PEG LENGTH DIMENSION	6/6/16	SLS

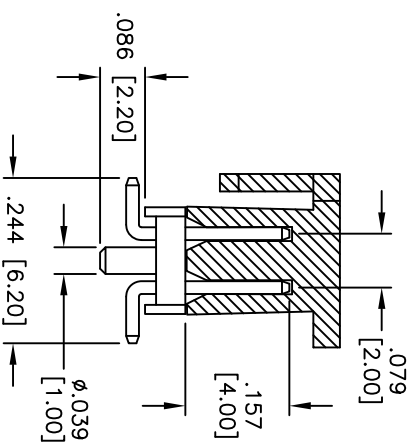

RECOMMENDED PCB LAYOUT

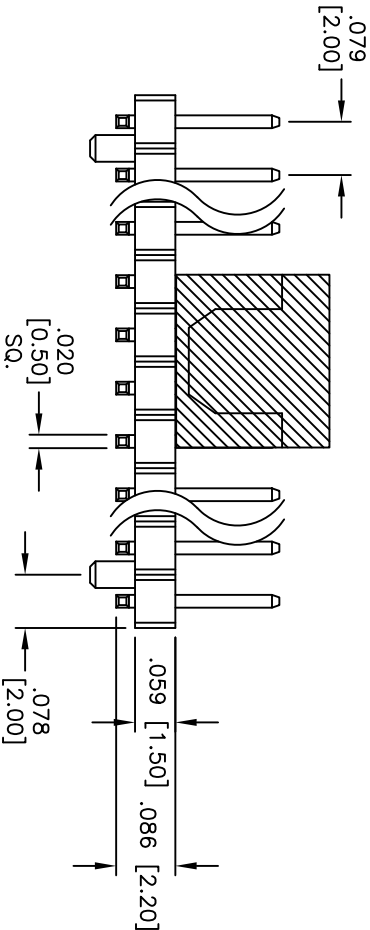

SPECIFICATIONS:

Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1 Amp max
Contact resistance: 20 mohms min @ 500 VDC
Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating: Operating temperature: -55°C to +105°C
Environmental: Lead free, RoHS compliant

PACKAGED ON TAPE & REEL

Positions: 4 thru 80
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	AY	11/7/13		SIZE		PART NO.		REV.			
CHECKED	GC	11/7/13		X		2PH2-XX-UA-SMT-P-L-PP-T/R		A			
APPROVED				REF:		SCALE: NTS		SHEET 1 OF 1			

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.079 [2.00] DUAL ROW PIN HEADER
SURFACE MOUNT, GOLD PLATED