

Rev	AWO #	Description	Date	Appr
-	-	RELEASED	9/4/13	


APPROVED: _____


DATE: _____ TITLE: _____

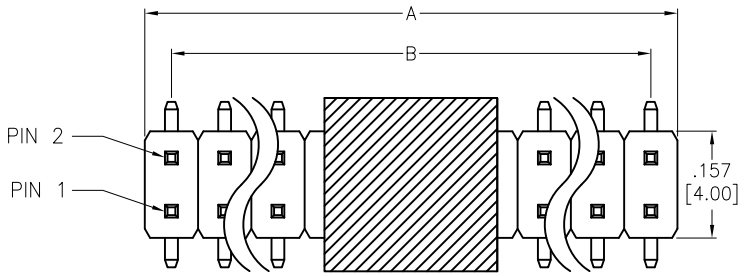

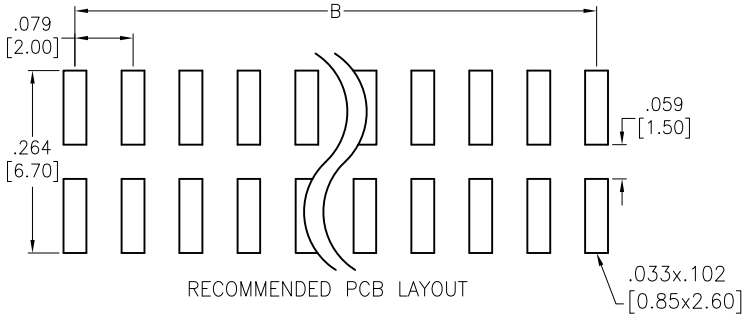

RECOMMENDED PCB LAYOUT

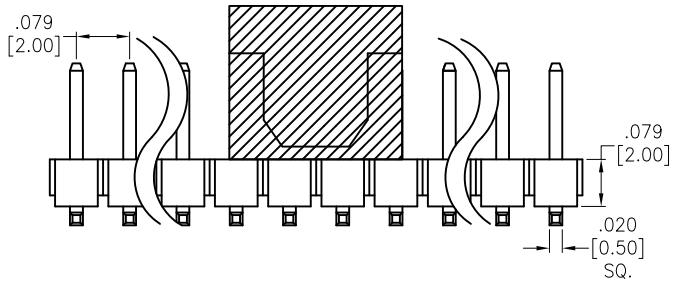



PACKAGED ON TAPE & REEL

Positions: 04 thru 80

A = .079 [2.00] x No. of Positions per Row

B = .079 [2.00] x No. of Spaces

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/4/13
CHECKED	NP	9/4/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] DUAL ROW PIN HEADER SURFACE MOUNT, GOLD FLASH, WITH CAP

SIZE	PART NO.	REV.
X	2PH2-XX-UA-SMT-PP-T/R	-

REF: S00059T | SCALE: NTS | SHEET 1 OF 1