

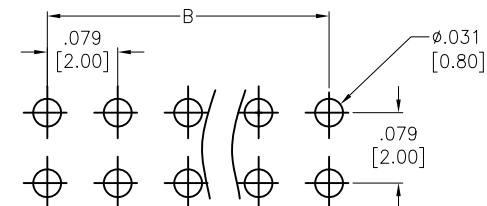
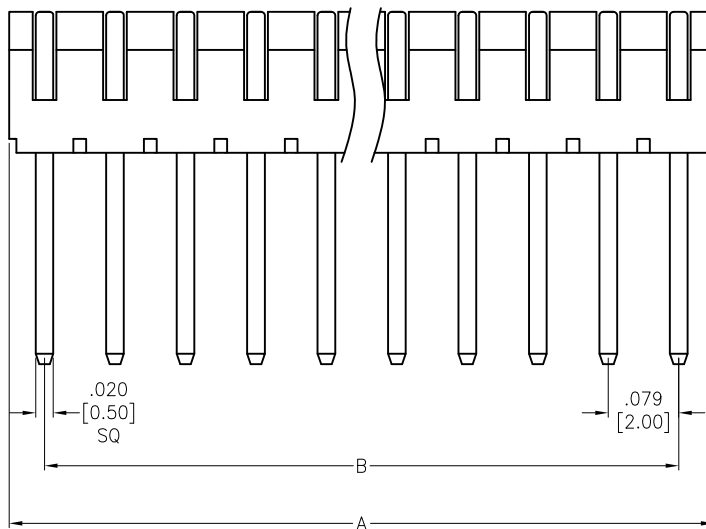


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/22/20	

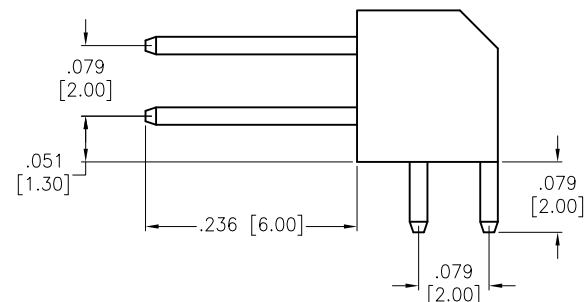

RECOMMENDED P.C.B. LAYOUT

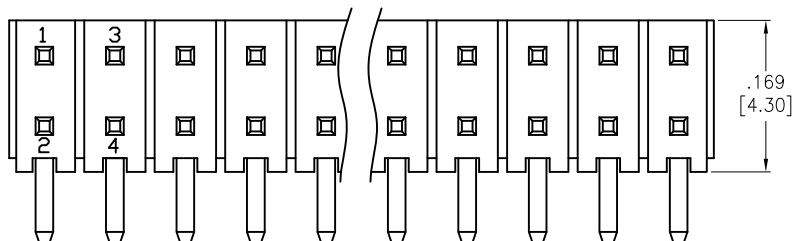

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 2 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC For 1 Minute
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 04 thru 80

A= .079 [2.00] x No. of Positions per Row

B= .079 [2.00] x No. of Space

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS			DATE		TITLE	
DRAWN		OW	9/22/20		.079 [2.00] DUAL ROW PIN HEADER, R/A	
CHECKED		OC	9/22/20		GOLD PLATED, HI-TEMP	
APPROVED			SIZE X		PART NO. 2PH2HR-XX-U-.236/.079-HT	
			REF: S00111C		SCALE: NTS	
					SHEET 1 OF 1	
					REV. -	