

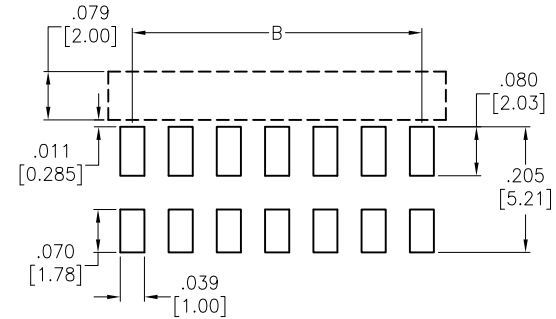
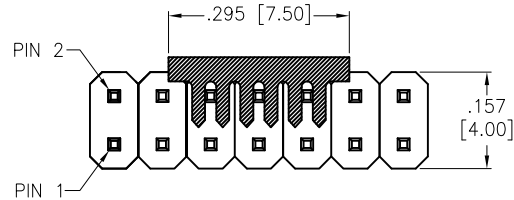


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/17	

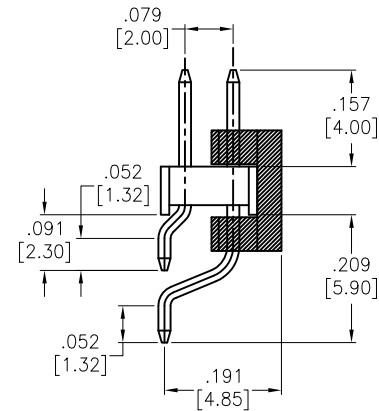

RECOMMENDED PCB LAYOUT

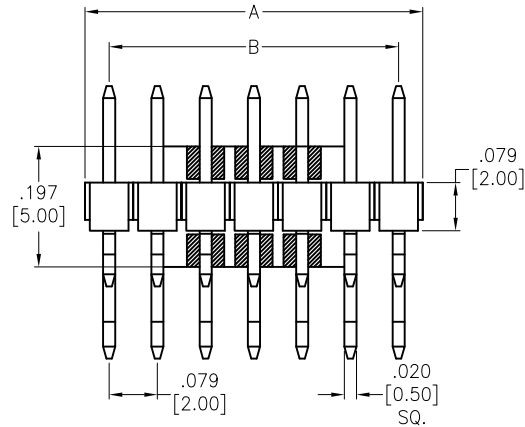

SPECIFICATIONS:

Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp max
Contact resistance: 15 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 500 V for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 04 thru 80

A = .079 [2.00] x No. of Positions per Row - .010 [0.25]

B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES		HOLES		TITLE .079 [2.00] DUAL ROW PIN HEADER RIGHT ANGLE, SMT, GOLD FLASH PLATED			
.X ± .10	Ø.X ± .10						
.XX ± .020	Ø.XX ± .015						
.XXX ± .015	Ø.XXX ± .010						
APPROVALS		DATE		SIZE X			
DRAWN	AY	4/7/17					
CHECKED	OC	4/7/17					
APPROVED							
				REF: S00059T		SCALE: NTS	SHEET 1 OF 1