

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/5/11	
A		UPDATED DRAWING	12/15/15	HR/AY


APPROVED: _____


DATE: _____ TITLE: _____

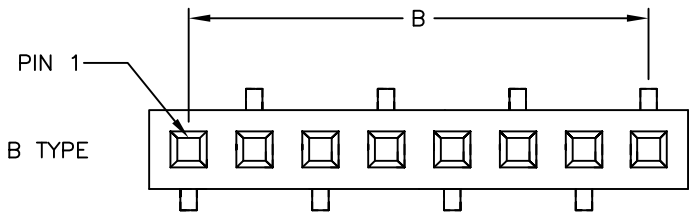

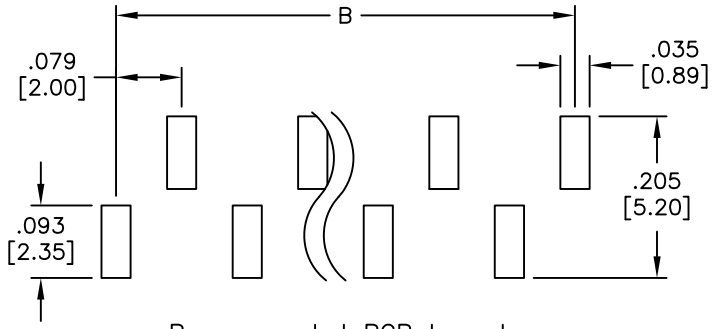

Recommended PCB Layout

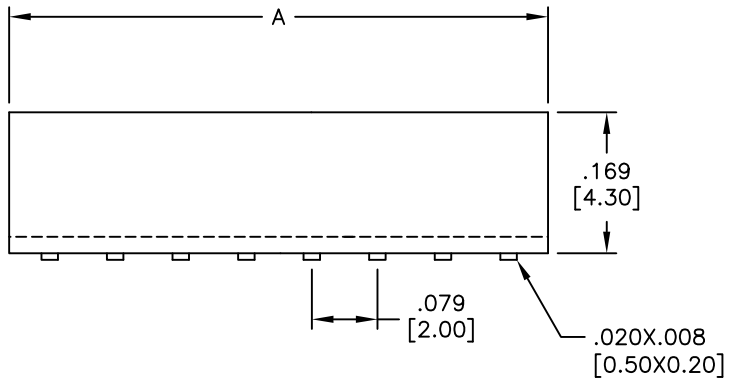



SPECIFICATIONS:

Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze

Plating:
Gold flash over nickel underplate on contact area,
Tin over copper underplate tails.

Electrical:
Current rating: 1 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
Operating temperature: –40°C to +105°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 01 thru 40
A = .079 [2.00] x No. of Positions
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/5/11
CHECKED	AH	7/5/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079[2.00]SINGLE ROW RECEPTACLE STRIP .169[4.30]HEIGHT,SMT,TYPE B

SIZE	PART NO.	REV.
X	2RS1-XX-SG-SMT-B	A

REF:	SCALE:	SHEET
S00059T	NTS	1 OF 1