

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/9/22	

APPROVED: _____

DATE: _____ TITLE: _____

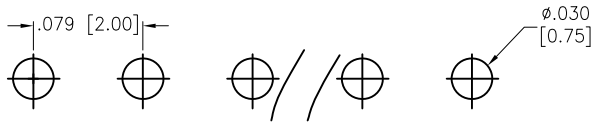

RECOMMENDED PCB LAYOUT

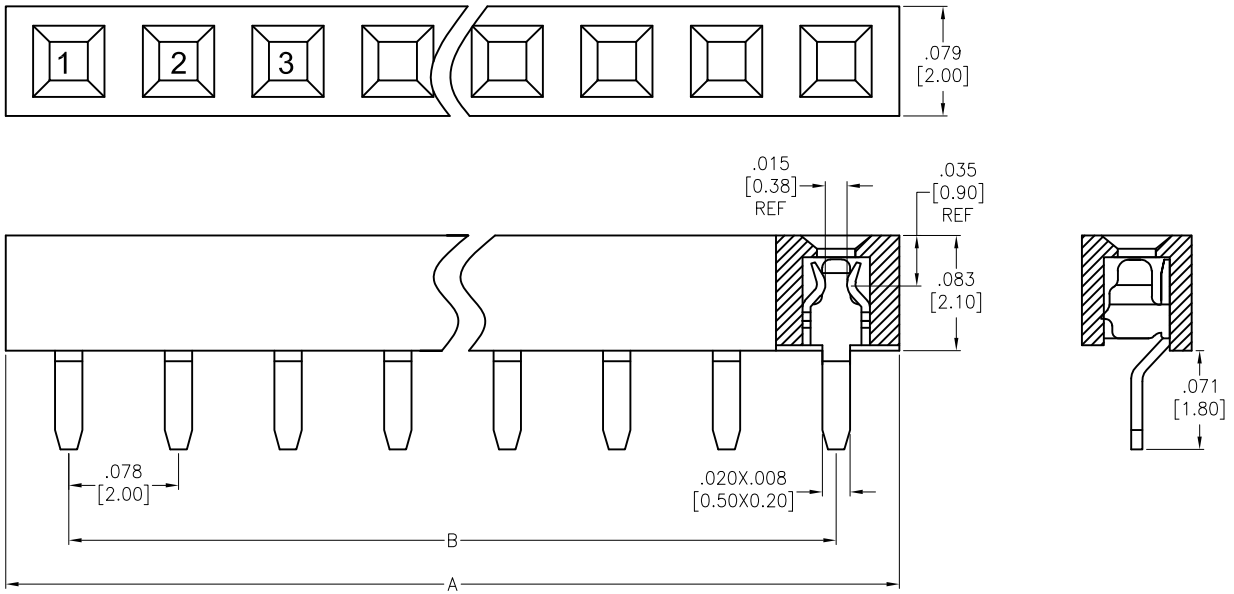

PECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 2 Amp
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Positions: 01 thru 50
A = .079 [2.00] x No. of Positions + .012 [0.30]
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	JJ	5/9/22
CHECKED	TY	5/9/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] SINGLE ROWRECEPTACLE STRIP, .083 [2.10] HEIGHT, GOLD PLATED

SIZE	PART NO.	REV.
X	2RS1GC-XX-G-HT	-

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1