


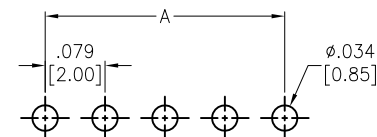


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/21/09	
A		UPDATED DRAWING	6/21/18	HR/RC1

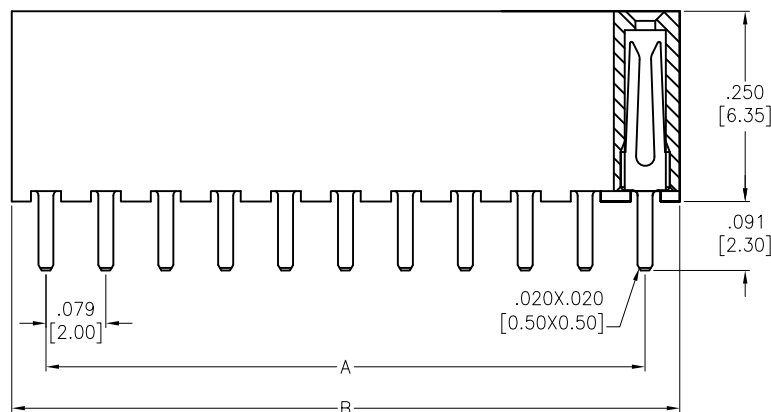

RECOMMENDED PCB LAYOUT



SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Current rating: 2 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 02 thru 40

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Positions + .012 [0.30]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE	
DRAWN	SS	7/21/09	
CHECKED			
APPROVED			
TITLE		.079 [2.00] SINGLE ROW RECEPTACLE STRIP .250 [6.35] HEIGHT, VERTICAL MOUNT	
SIZE	PART NO.	REV.	
X	2RS1H-XX-T-HT	A	
REF:	S00032T	SCALE:	NTS
		SHEET 1 OF 1	