

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/10/11	
A		REDRAWN	7/3/14	AY/GH
B		UPDATE DIM.	1/3/17	AY/MY
C		UPDATE DIM.	3/13/17	AY/DH

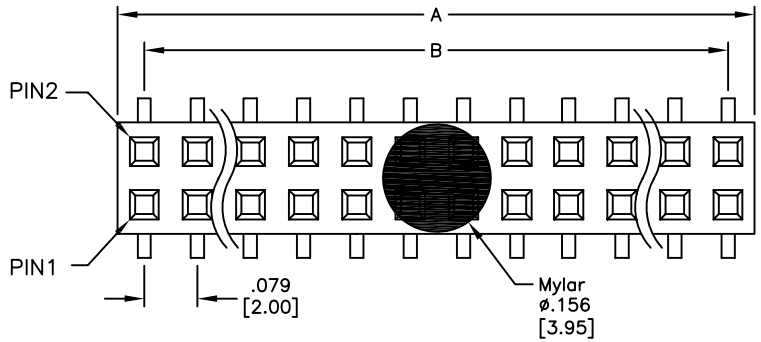

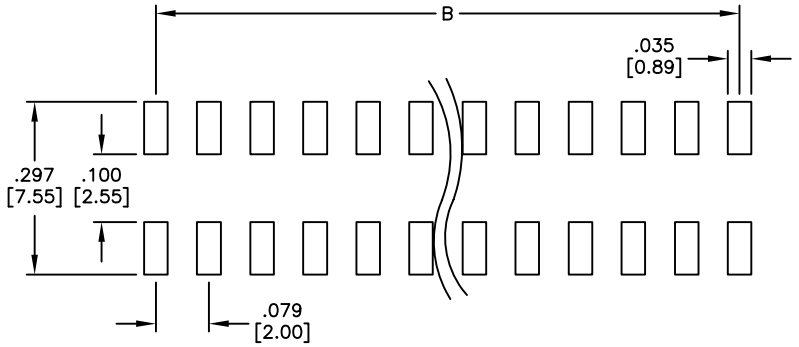

RECOMMENDED PCB LAYOUT

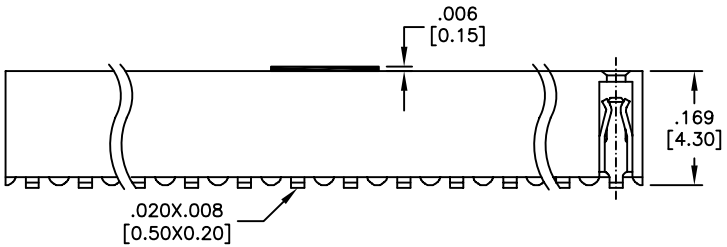



SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 04 thru 80
A = .079 [2.00] x No. of Positions
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/10/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079x.079 DUAL ROW RECEPTACLE STRIP .169 [4.30] HEIGHT, SMT

SIZE	PART NO.	REV.
X	2RS2-XX-G-SMT-KT-T/R	C

REF: S00059T | SCALE: NTS | SHEET 1 OF 1