

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/15	
A		UPDATE DRAWING	5/25/20	LH/BL

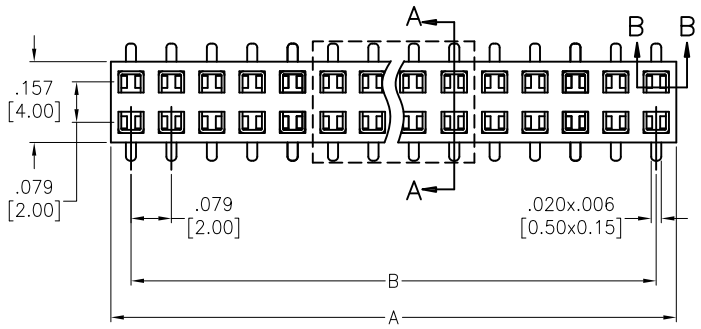


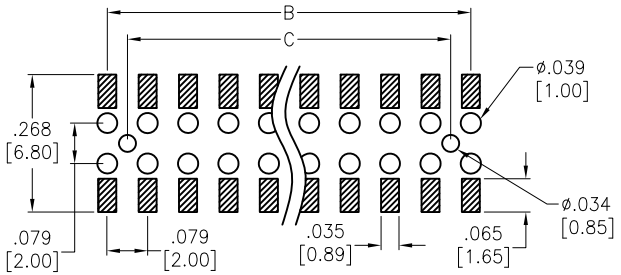


RECOMMENDED PCB LAYOUT

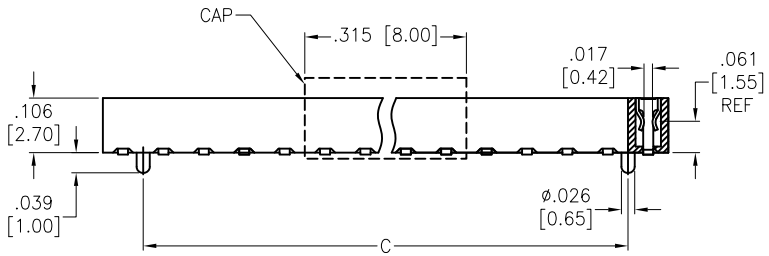

SECTION B–B



SECTION A–A



SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall.
Electrical:
Current rating: 2 Amp max.
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Withstand voltage: 500V AC/DC
Temperature Rating:
Operating temperature: –40°C to +125°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 04 thru 80
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spaces
C = .079 [2.00] x No. of Positions per Row – .157 [4.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/7/15
CHECKED	LW	4/7/15
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 x .079 DUAL ROW RECEPTACLE STRIP
.106 [2.70] HEIGHT, SMT, BOTTOM ENTRY, W/PEG

SIZE	PART NO.	REV.
X	2RS2B-A-XX-G-SMT-P-PP-T/R	A

REF: S00019C | SCALE: NTS | SHEET 1 OF 1