
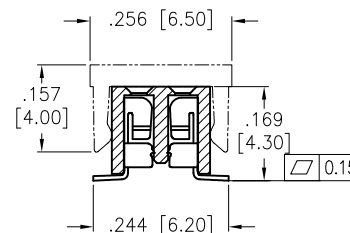
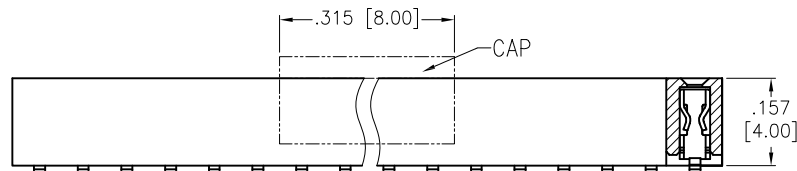
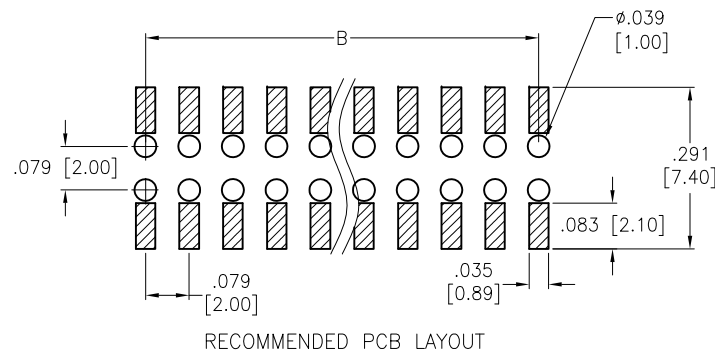


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/23/15	
A		UPDATE SPEC.	12/30/15	AY
B		UPDATE SPEC.	9/13/16	AY/CH

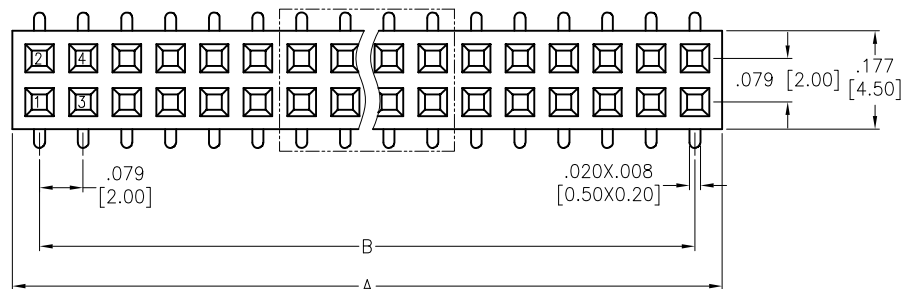

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

10u" Gold over Nickel underplate on contact area.

Gold over Nickel underplate overall

Electrical:

Current rating: 2 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 500 Mohms min.

Dielectric withstanding voltage: 500V AC/DC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 80

A = .079 [2.00] x No. of Positions per Row +.020 [0.50]

B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	6/23/15
CHECKED	LW	6/23/15
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 x .079 DUAL ROW RECEPTACLE STRIP
.157 [4.00] HEIGHT, SMT TYPE

SIZE	PART NO.	REV.
X	2RS2L-XX-G-SMT-10-PP	B
REF:	S00019C	SCALE: NTS
SHEET 1 OF 1		