

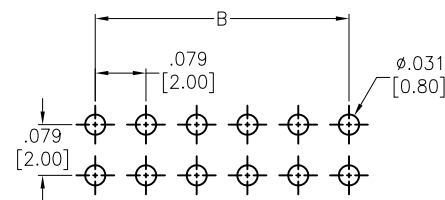
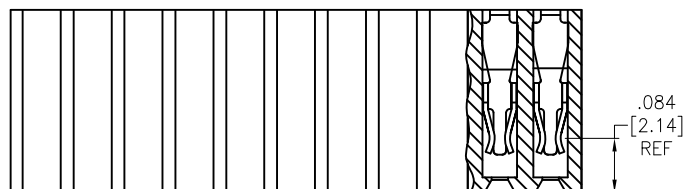


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/26/18	
A		UPDATED DRAWING	5/17/18	HR/RC1

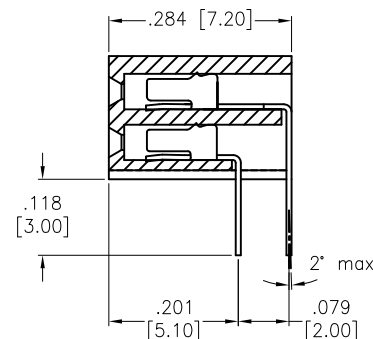

RECOMMENDED PCB LAYOUT

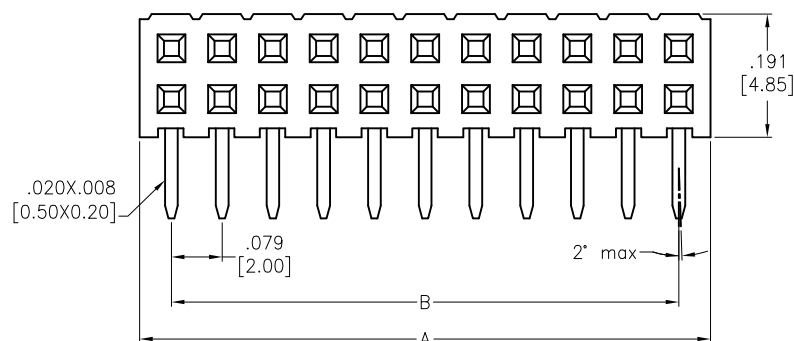

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 2 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 04 thru 80

A= .079 [2.00] x No. of Positions per Row + .020 [0.50]

B= .079 [2.00] x No. of Space

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710						
APPROVALS						TITLE			
DRAWN		SS	1/26/18			.079 x .079 DUAL ROW RECEPTACLE STRIP RIGHT ANGLE,DIP TYPE SIDE ENTRY			
CHECKED						SIZE X	PART NO. 2RS2R-XX-G-HT		REV A
APPROVED						REF: S00032T		SCALE: NTS	SHEET 1 OF 1